
**Information technology — Streaming
Lossless Data Compression algorithm
(SLDC)**

Technologies de l'information — Algorithme de compression sans perte de données en mode continu (SDLC)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

1	Scope	1
2	Conformance	1
3	Normative reference	1
4	Terms and definitions	1
4.1	Access Point	1
4.2	Control Symbol	1
4.3	Copy Pointer	1
4.4	data byte	1
4.5	Data Symbol	1
4.6	Displacement Field	1
4.7	Encoded Data Stream	1
4.8	Encoded Record	1
4.9	End Marker	2
4.10	End Of Record Symbol (EOR Symbol)	2
4.11	File Mark	2
4.12	File Mark Symbol	2
4.13	Flush Symbol	2
4.14	History Buffer	2
4.15	Literal 1	2
4.16	Literal 2	2
4.17	Matching String	2
4.18	Match Count	2
4.19	Match Count Field	2
4.20	Pad	2
4.21	Record	2
4.22	Record Segment	2
4.23	Reset X Symbol	2
4.24	Reset 1 Symbol	2
4.25	Reset 2 Symbol	2
4.26	scheme 1	2
4.27	Scheme 1 Symbol	2
4.28	scheme 2	3
4.29	Scheme 2 Symbol	3
4.30	user data	3
5	Conventions and Notations	3
5.1	Representation of numbers	3
5.2	Names	3
6	Acronyms	3
7	Algorithm Overview	3
7.1	Scheme 1 Encoding	3
7.2	Scheme 2 Encoding	3
7.3	History Buffer	4
8	Encoding Specification	4
8.1	User Data	4
8.2	History Buffer	4
8.3	Encoded Data Stream	4

ISO/IEC 22091:2002(E)

8.3.1	Access Point	5
8.4	Data Symbols	5
8.4.1	Literal 1 Data Symbols	5
8.4.2	Copy Pointer Data Symbols	5
8.4.3	Literal 2 Data Symbols	6
8.5	Control Symbols	7
8.6	Pad	8

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 22091 was prepared by ECMA (as ECMA-321) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information Technology*, in parallel with its approval by national bodies of ISO and IEC.

Information technology — Streaming Lossless Data Compression algorithm (SLDC)

1 Scope

This International Standard specifies a lossless compression algorithm to reduce the number of 8-bit bytes required to represent data records and File Marks. The algorithm is known as Streaming Lossless Data Compression algorithm (SLDC).

One buffer size (1 024 bytes) is specified.

The numerical identifier according to ISO/IEC 11576 allocated to this algorithm is 6.

2 Conformance

A compression algorithm shall be in conformance with this International Standard if its Encoded Data Stream satisfies the requirements of this International Standard.

3 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 11576:1994 *Information technology — Procedure for the registration of algorithms for the lossless compression of data*

4 Terms and definitions

For the purpose of this International Standard the following terms and definitions apply.

4.1 Access Point

A location in the Encoded Data Stream at which data may be decoded.

4.2 Control Symbol

A Control Symbol may change the compression scheme, reset the History Buffer, mark the end of a Record, indicate a File Mark, or indicate the termination of an Encoded Data Stream.

4.3 Copy Pointer

A part of the Encoded Data Stream output in scheme 1 that replaces a string of data bytes with a specification of a Matching String.

4.4 data byte

An element of user data that is to be encoded.

4.5 Data Symbol

An element of an Encoded Record that represents one or more data bytes.

4.6 Displacement Field

A field in the Copy Pointer that specifies the location within the History Buffer of the first byte of a Matching String.

4.7 Encoded Data Stream

The output stream after encoding User Data.

4.8 Encoded Record

The output stream after encoding one Record of user data.

4.9 End Marker

A Control Symbol that denotes termination of an Encoded Data Stream.

4.10 End Of Record Symbol (EOR Symbol)

A Control Symbol that denotes the end of a Record in the Encoded Data Stream.

4.11 File Mark

A recorded element used to mark organisational boundaries (e.g. directory boundaries) in user data.

4.12 File Mark Symbol

A Control Symbol in Encoded Data Stream that denotes a File Mark in user data.

4.13 Flush Symbol

A Control Symbol that, if required, is followed by Pad to make the size of the Encoded Data Stream an integer multiple of 32 bits.

4.14 History Buffer

A data structure where incoming data bytes are stored for use by scheme 1 compression and decompression.

4.15 Literal 1

A part of the Encoded Data Stream, output in scheme 1, that represents a single data byte not encoded into any Copy Pointer.

4.16 Literal 2

A part of the Encoded Data Stream, output in scheme 2, that represents a single data byte.

4.17 Matching String

A sequence of two or more bytes in the History Buffer that is identical with a sequence of bytes in the user data.

4.18 Match Count

The length, in bytes, of a Matching String.

4.19 Match Count Field

That part of a Copy Pointer that specifies the Match Count.

4.20 Pad

A number of bits inserted into the Encoded Data Stream so that the size of Encoded Data Stream is an integer multiple of 32 bits.

4.21 Record

An element of user data that contains at least one data byte.

4.22 Record Segment

A section of a Record encoded in a given scheme.

4.23 Reset X Symbol

A generic reference to either the Reset 1 Symbol or the Reset 2 Symbol.

4.24 Reset 1 Symbol

A Control Symbol that indicates History Buffer reset, and that subsequent symbols are encoded in scheme 1.

4.25 Reset 2 Symbol

A Control Symbol that indicates History Buffer reset, and that subsequent symbols are encoded in scheme 2.

4.26 scheme 1

A compression scheme that uses a History Buffer to achieve data compression.

4.27 Scheme 1 Symbol

A Control Symbol that indicates subsequent Data Symbols are either Copy Pointers or Literal 1s.

4.28 scheme 2

A packing scheme designed to encode uncompressible data with minimal expansion.

4.29 Scheme 2 Symbol

A Control Symbol that indicates subsequent Data Symbols are encoded in scheme 2.

4.30 user data

Information that is to be encoded, according to this compression algorithm.

5 Conventions and Notations

5.1 Representation of numbers

The following conventions and notations apply in this document unless otherwise stated.

- The setting of bits is denoted by ZERO or ONE.
- Numbers in binary notation and bit combinations are strings of digits represented by ZEROs and ONES with the most significant bit to the left.
- Letters and digits in parentheses represent numbers in hexadecimal notation.
- All other numbers are in decimal form.

5.2 Names

The names of basic elements, e.g. specific fields, are written with a capital initial letter.

6 Acronyms

EOR End Of Record

lsb least significant bit

msb most significant bit

7 Algorithm Overview

User data that is to be compressed according to this International Standard consists of Records and File Marks. Records consist of 8-bit data bytes, and may be of any non-zero length.

Data bytes may be encoded in either scheme 1 or scheme 2.

7.1 Scheme 1 Encoding

There may exist within Records repeating strings of two or more data bytes such that information about the length and position of one string may be substituted in place of a subsequent copy or copies of that same string. This information is known as a Copy Pointer. This International Standard allows Copy Pointer substitution when corresponding bytes of the two strings are offset by 1 to 1 023 data bytes within user data. Where string matches occur, data compression is possible, and the number of bits of encoded data can be less than the number of bits of user data, and data compression is possible. Any data bytes that are part of a repeated string may be encoded as a Copy Pointer. Any data byte that is not encoded as a Copy Pointer is encoded as a Literal 1, in which a leading bit set to ZERO is added to the data byte, thereby indicating that this is a Literal 1. Regions over which Copy Pointers and literal values are encoded are defined as being encoded according to scheme 1. Scheme 1 encoding is identical with that of ISO/IEC 15200, except for the addition of Control Symbols. These are both implementations of the Lempel-Ziv 1 (LZ1) class of data compression algorithms. Following a Reset 1 Symbol or a Scheme 1 Symbol, all bytes of user data shall be encoded according to scheme 1.

7.2 Scheme 2 Encoding

There may also exist within user data, regions in which few such repeating strings exist. Where there are no repeating strings, scheme1 encoding requires a 9-bit Literal 1 value in the Encoded Data Stream for every data byte. This results in an Encoded Data Stream that has 12,5 % more bits than the user data. In order to avoid this data expansion, scheme 2 encoding may be used. In scheme 2 encoding, data bytes are copied to the output bit stream. In order for a decoder to distinguish a data byte set to (FF) from a Control Symbol, a trailing bit set to ZERO is encoded following every data byte of (FF). For random data, this tends to produce an Encoded Data Stream that has about 0,05 % more bits than the user data. Following a Reset 2 Symbol or a Scheme 2 Symbol, all bytes of user data shall be encoded according to scheme 2.

7.3 History Buffer

Matching strings are found within a 1 024-byte History Buffer. Prior to a Reset X Symbol in the Encoded Data Stream, the History Buffer is undefined. Immediately following a Reset X Symbol, the History Buffer is defined as containing no data.

As the first 1 024 data bytes following a Reset X Symbol are recorded, each byte is stored in a subsequent location in the History Buffer, from 0 to 1 023. For each data byte N, comparisons may be made with each of the data bytes at locations 0 to N-1 to test for Matching Strings.

Once the History Buffer is filled, new bytes replace previously stored bytes in locations 0 to 1 023. The storage location wraps from 1 023 to 0. For a data byte stored at location N, comparisons may be made with each of the data bytes at locations other than N, to test for Matching Strings. Matching Strings may wrap around the end of the History Buffer (e.g. Offset 1 022, Length 10).

By updating the History Buffer identically during decoding, the decoder History Buffer shall be identical, after outputting any specific data byte, with the encoder History Buffer after encoding that same data byte. It is, therefore, not necessary to separately include history content information within the Encoded Data Stream.

This International Standard does not specify the conditions under which to reset the History Buffer, switch between scheme 1 and scheme 2, or flush to a 32-bit boundary.

8 Encoding Specification

8.1 User Data

User data shall consist of Records and File Marks. Records may contain any number of 8-bit data bytes. File Marks may be used to mark organisational boundaries (e.g. directory boundaries) in user data.

8.2 History Buffer

A History Buffer shall be filled with 1 024 byte locations, numbered 0 to 1 023. For any data byte being recorded, the History Buffer may contain the 1 023 preceding data bytes. The content of the History Buffer is initially undefined.

Immediately following a Reset X Symbol, the History Buffer is said to contain no data. As each byte N of the first 1 024 bytes are recorded, that byte is stored to location N, from 0 to 1 023, and History Buffer locations 0 to N-1 may be examined to find matching data bytes.

After a data byte is recorded in location 1 023, the next data byte is recorded in location 0, replacing the first data byte that was stored there. As each subsequent data byte is stored to location N, all History Buffer locations other than location N may be examined to find matching data bytes.

Data bytes shall be recorded sequentially into the History Buffer regardless of Record boundaries, File Marks, or encoding scheme. A Reset X Symbol causes the next data byte to be stored to location 0, regardless of the location to which any previous byte was stored.

8.3 Encoded Data Stream

An Encoded Data Stream is a stream of Data Symbols, Control Symbols, and Pads. These shall be packed into consecutive bytes, starting with the most significant bit of byte 0. Figure 1 shows a Control Symbol followed by Data Symbol packed into bytes.

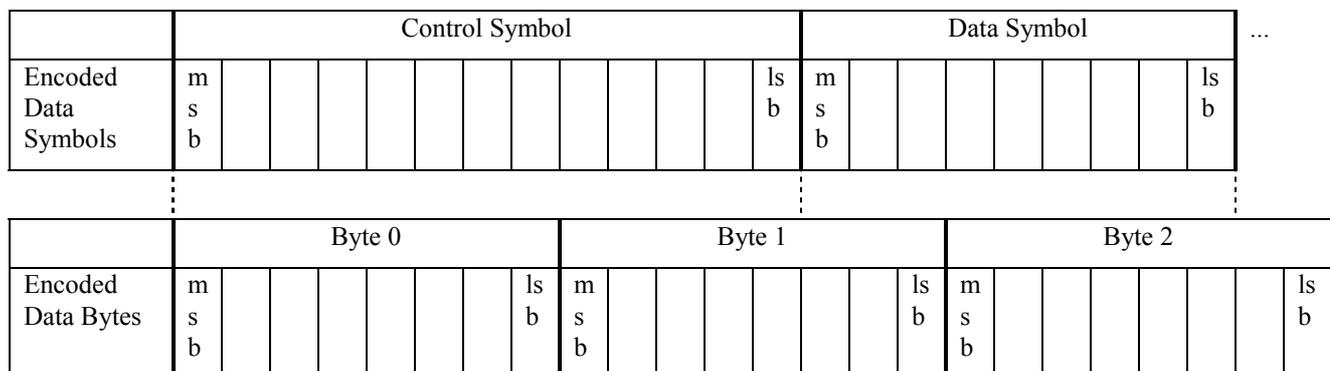


Figure 1 – Encoded Data Stream, packing into bytes

NOTE - Although an Encoded Data Stream is filled with Pad to 32-bit boundaries, packing is expressed by 8-bit bytes. This allows byte ordering within larger words to be specified by any application that uses this compression algorithm.

8.3.1 Access Point

An Access Point is a location in the Encoded Data Stream at which data may be decoded, starting with either a File Mark or the first data byte of a Record. An Access Point must meet the following three requirements.

- It shall occur at a 32-bit boundary. (Previous data shall be padded).
- A Reset X Symbol shall precede the first Data Symbol following the Access Point.
- The first Data Symbol following the Access Point shall represent the first data byte in a Record.

8.4 Data Symbols

Data Symbols shall be used to represent bytes of user data. The Data Symbols are Literal 1, Copy Pointer, or Literal 2.

Following either a Scheme 1 Symbol or a Reset 1 Symbol, only Literal 1 and Copy Pointer Symbols shall be used to represent data bytes (scheme 1 encoding).

Following either a Scheme 2 Symbol or a Reset 2 Symbol, only Literal 2 Symbols shall be used to represent data bytes (scheme 2 encoding).

8.4.1 Literal 1 Data Symbols

Literal 1 Data Symbols shall be used in scheme 1 encoding to represent all data bytes that are not encoded as part of a Copy Pointer. They shall be 9-bit Symbols, consisting of a leading bit set to ZERO and a copy of the data byte, as shown in figure 2.

8	7	6	5	4	3	2	1	0
ZERO	data byte							

Figure 2 – Literal 1 Data Symbol

8.4.2 Copy Pointer Data Symbols

A Copy Pointer Data Symbol may be used in scheme 1 encoding to represent a string of data bytes for which a Matching String exists in the History Buffer. A Copy Pointer shall consist of a leading bit set to ONE, an M-bit Match Count Field, and a 10-bit Displacement Field, as shown in figure 3.

NOTE - This International Standard does not require that all Matching Strings be represented by Copy Pointer Data Symbols, nor does it specify a priority when multiple Matching Strings occur.

M+10	M+9 to 10	9	8	7	6	5	4	3	2	1	0
ONE	Match Count Field	Displacement Field									

Figure 3 – Copy Pointer Data Symbol

The Displacement Field shall contain the location in the History Buffer of the first data byte of the Matching String.

The Match Count Field shall have the length and value specified in Table 1, that indicates the length of the Matching String.

Table 1 – Match Count Field values

Match String Length (bytes)	Match Count Field value
2	0 0
3	0 1
4	10 00
5	10 01
6	10 10
7	10 11
8	110 000
9	110 001
:	:
15	110 111
16	1110 0000
17	1110 0001
:	:
31	1110 1111
32	1111 00000000
33	1111 00000001
:	:
270	1111 11101110
271	1111 11101111
Reserved and Control Symbols	1111 11110000 : 1111 11111111

A Copy Pointer may only replace data bytes from a single Record so that an EOR Symbol in the Encoded Data Stream precisely indicates the end of one Record.

A Copy Pointer may refer to a Matching String that includes data bytes from more than one Record, that span File Marks, or that were encoded in scheme 2.

The second byte of the Matching String may not exist in the History Buffer when the match begins (e.g. the first byte of the string to be replaced may become the second byte of a matching string). Conversely, the first bytes of a Matching String may be overwritten by the bytes of a string being replaced by a Copy Pointer as they are entered sequentially into the History Buffer. Thus, the Matching String and the string being replaced need not coexist in their entirety in the History Buffer at the same time.

8.4.3 Literal 2 Data Symbols

Literal 2 Data Symbols shall be used in scheme 2 encoding to represent all data bytes. For data bytes set to (00) to (FE), they shall be 8-bit Symbols, consisting only of a copy of the data byte, as shown in figure 4. For data bytes set to (FF), they shall be 9-bit Symbols, consisting of a copy of the data byte followed by a ZERO, as shown in figure 5.

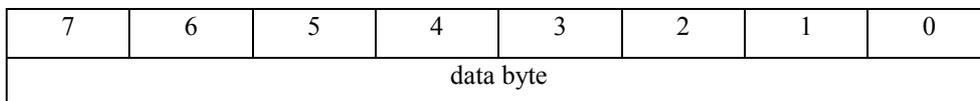


Figure 4 – Literal 1 Data Symbol, data byte (00) to (FE)

8	7	6	5	4	3	2	1	0
data byte								ZERO

Figure 5 – Literal 1 Data Symbol, data byte (FF)

NOTE - The added ZERO following the data byte (FF) allows a decoder to distinguish between a Literal 2 and a Control Symbol, since all Control Symbols have nine leading bits set to ONE.

8.5 Control Symbols

Control Symbols are inserted into the Encoded Data Stream so that a decoder can correctly decode the Data Symbols. Table 1 lists the names and values of the Control Symbols. The column labelled Pad indicates whether this Symbol is followed by a Pad set to all ZEROs or all ONES. If the column labelled Pad has a value of None, then there is no Pad, and subsequent Symbols are packed into bytes normally.

Table 1 – Control Symbol Values

Control Symbol	Value	Pad
Flush	1 1111 1111 0000	ZEROs
Scheme 1	1 1111 1111 0001	None
Scheme 2	1 1111 1111 0010	None
File Mark	1 1111 1111 0011	ZEROs
EOR	1 1111 1111 0100	ZEROs
Reset 1	1 1111 1111 0101	None
Reset 2	1 1111 1111 0110	None
End Marker	1 1111 1111 1111	ONES

A Flush Symbol may be used to make the size of the Encoded Data Stream an integer multiple of 32 bits.

A Scheme 1 Symbol indicates that following Data Symbols are encoded in scheme 1.

A Scheme 2 Symbol indicates that following Data Symbols are encoded in scheme 2.

A File Mark Symbol represents a File Mark in user data.

An EOR Symbol shall follow the Data Symbol that encodes one or more bytes up to and including the last data byte of a Record, and precede the first Data Symbol of the next Record.

A Reset 1 Symbol indicates that the following Data Symbols are encoded in scheme 1, and that the History Buffer is reset.

A Reset 2 Symbol indicates that the following Data Symbols are encoded in scheme 2, and that the History Buffer is reset.

An End Marker shall be used to mark the end of an Encoded Data Stream, and shall occur only outside of any Encoded Records.

The following requirements apply to sequences of Control Symbols and Data Symbols:

- A Flush Control Symbol, followed by Pad, may be inserted into an Encoded Data Stream at any location.
- File Mark and End Marker Symbols shall begin on 32-bit boundaries, and may not be located within Encoded Records.
- An empty set of user data shall be indicated by encoding an End Marker Symbol prior to any other Symbols.
- Following an End Marker Symbol, the History Buffer shall be undefined at the beginning of another Encoded Data Stream.

- A Reset X or Scheme X Symbol that occurs outside an Encoded Record shall be followed immediately by either a Flush Symbol or a Data Symbol.

8.6 Pad

A Pad may be from 0 to 31 bits in length. The bits of a Pad shall be set to either all ZEROs or all ONES, as specified in Table 1.

NOTE - A Flush Symbol that starts fewer than 13 bits before a 32-bit boundary will require Pad up to the next 32-bit boundary. The entire Flush and Pad can therefore be from 13 to 44 bits.

ICS 35.220.20

Price based on 8 pages