
**Information technology —
Telecommunications and information
exchange between systems — Private
Integrated Services Network —
Specification, functional model and
information flows — Single Step Call
Transfer Supplementary Service**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseau privé à intégration de services —
Spécifications, modèle fonctionnel et flux d'informations — Service
supplémentaire de transfert d'appel à pas unique*

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO/IEC 2001

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

	Page
Foreword	v
Introduction	vi
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Terms and definitions	2
4.1 External definitions	2
4.2 Other definitions	2
4.2.1 Additional network feature (ANF)	2
4.2.2 Original Call, Original Connection	2
4.2.3 New Call, New Connection	2
4.2.4 User A, Transferring User	2
4.2.5 User B, Transferred User	2
4.2.6 User C, Transferred-To User	2
5 List of acronyms	3
6 SS-SSCT stage 1 specification	3
6.1 Description	3
6.1.1 General description	3
6.1.2 Qualifications on applicability to telecommunication services	3
6.2 Procedure	3
6.2.1 Provision/withdrawal	3
6.2.2 Normal procedures	3
6.2.3 Exceptional procedures	3
6.3 Interaction with other supplementary services and ANFs	4
6.3.1 Calling Line Identification Presentation (SS-CLIP)	4
6.3.2 Connected Line Identification Presentation (SS-COLP)	4
6.3.3 Calling/Connected Line Identification Restriction (SS-CLIR)	4
6.3.4 Calling Name Identification Presentation (SS-CNIP)	4
6.3.5 Calling Name Identification Restriction (SS-CNIR)	4
6.3.6 Connected Name Identification Presentation (SS-CONP)	4
6.3.7 Completion of Call to Busy Subscriber (SS-CCBS)	4
6.3.8 Completion of Call on No Reply (SS-CCNR)	4
6.3.9 Call Transfer (SS-CT)	4
6.3.10 Call Forwarding Unconditional (SS-CFU)	4
6.3.11 Call Forwarding Busy (SS-CFB)	4
6.3.12 Call Forwarding No Reply (SS-CFNR)	4
6.3.13 Call Deflection (SS-CD)	4
6.3.14 Path Replacement (ANF-PR)	4
6.3.15 Call Offer (SS-CO)	4
6.3.16 Call Intrusion (SS-CI)	4
6.3.17 Do not Disturb (SS-DND)	5
6.3.18 Do not Disturb Override (SS-DNDO)	5

6.3.19	Advice of Charge (SS-AOC)	5
6.3.20	Recall (SS-RE)	5
6.3.21	Call Interception (ANF-CINT)	6
6.3.22	Transit Counter (ANF-TC)	6
6.3.23	Route Restriction Class (ANF-RRC)	6
6.3.24	Message Waiting Indication (SS-MWI)	6
6.3.25	Wireless Terminal Location Registration (SS-WTLR)	6
6.3.26	Wireless Terminal Incoming Call (ANF-WTMI)	6
6.3.27	Wireless Terminal Outgoing Call (ANF-WTMO)	6
6.3.28	Wireless Terminal Authentication of a CTM User (SS-WTAT)	6
6.3.29	Wireless Terminal Authentication of the PISN (SS-WTAN)	6
6.3.30	Private User Mobility Incoming Call (ANF-PUMI)	6
6.3.31	Private User Mobility Outgoing Call (ANF-PUMO)	6
6.3.32	Private User Mobility Registration (SS-PUMR)	6
6.3.33	Common Information (ANF-CMN)	6
6.3.34	Call Priority Interruption (Protection) (SS-CPI(P))	6
6.4	Interworking considerations	6
6.4.1	User B and/or User C in another network	6
6.4.2	User A in another network	7
6.5	Overall SDL	8
7	SS-SSCT stage 2 specification	9
7.1	Functional model	9
7.1.1	Functional model description	9
7.1.2	Description of functional entities	10
7.1.3	Relationship of functional model to Basic Call functional model	10
7.2	Information flows	11
7.2.1	Definition of information flows	11
7.2.2	Examples of information flow sequences	14
7.3	Functional Entity actions	18
7.3.1	Functional Entity actions of FE1	18
7.3.2	Functional Entity actions of FE2	18
7.3.3	Functional Entity actions of FE3	18
7.3.4	Functional Entity actions of FE4	18
7.3.5	Functional Entity actions of FE5	19
7.3.6	Functional Entity actions of FE6	19
7.3.7	Functional Entity actions of FE7	19
7.4	Functional Entity behaviour	20
7.4.1	Behaviour of FE1	20
7.4.2	Behaviour of FE2	21
7.4.3	Behaviour of FE3	22
7.4.4	Behaviour of FE4	24
7.4.5	Behaviour of FE5	25
7.4.6	Behaviour of FE6	26
7.4.7	Behaviour of FE7	27
7.5	Allocation of functional entities to physical locations	28
Annex A	Difference between Single Step Call Transfer and Call Transfer by Rerouting	29

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 19459 was prepared by ECMA (as ECMA-299) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

Annex A of this International Standard is for information only.

Introduction

This International Standard is one of a series of Standards defining services and signalling procedures applicable to Private Integrated Services Networks (PISNs). The series uses the ISDN concepts as developed by ITU-T and conforms to the framework of International Standards for Open Systems Interconnection as defined by ISO/IEC.

This International Standard specifies the Single Step Call Transfer (SSCT) supplementary service.

This International Standard is based upon the practical experience of ECMA member companies and the results of their active and continuous participation in the work of ISO/IEC JTC 1, ITU-T, ETSI and other international and national standardization bodies. It represents a pragmatic and widely based consensus.

There is currently no equivalent service specified by ITU-T or ETSI for public ISDN.

Information technology — Telecommunications and information exchange between systems — Private Integrated Services Network — Specification, functional model and information flows — Single Step Call Transfer Supplementary Service

1 Scope

This International Standard specifies the Supplementary Service (SS) Single Step Call Transfer (SSCT), which is applicable to various basic services supported by Private Integrated Services Networks (PISN). Basic services are specified in ISO/IEC 11574.

SS-SSCT is a supplementary service that enables an SSCT user, user A, to transform an existing call between user A and user B into a new call between user B and a user C whereby user A does not have a call established with user C prior to call transfer.

Supplementary service specifications are produced in three stages, according to the method described in ETS 300 387. This International Standard contains the stage 1 and stage 2 specifications of SS-SSCT. The stage 1 specification (clause 6) specifies the general feature principles and capabilities. The stage 2 specification (clause 7) identifies the Functional Entities involved in the supplementary service and the information flows between them.

2 Conformance

In order to conform to this International Standard, a stage 3 standard shall specify signalling protocols and equipment behaviour that are capable of being used in a PISN which supports the supplementary service specified in this International Standard. This means that, to claim conformance, a stage 3 standard is required to be adequate for the support of those aspects of clause 6 (stage 1) and clause 7 (stage 2) which are relevant to the interface or equipment to which the stage 3 standard applies.

3 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 11571:1998, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Networks - Addressing*.

ISO/IEC 11574:2000, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit-mode 64 kbit/s bearer services - Service description, functional capabilities and information flows*.

ISO/IEC 11579-1:1994, *Information technology - Telecommunications and information exchange between systems - Private integrated services network - Part 1: Reference configuration for PISN Exchanges (PINX)*.

ISO/IEC 13864:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Specification, functional model and information flows - Name identification supplementary services*.

ISO/IEC 13865:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Specification, functional model and information flows - Call transfer supplementary service*.

ISO/IEC 13869:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call transfer supplementary service*.

ISO/IEC 14136:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Specification, functional model and information flows - Identification supplementary services*.

ETS 300 387:1994, *Private Telecommunication Network (PTN); Method for the specification of basic and supplementary services.*

ITU-T Rec. I.112:1993, *Vocabulary of terms for ISDNs.*

ITU-T Rec. I.210:1993, *Principles of telecommunication services supported by an ISDN and the means to describe them.*

ITU-T Rec. Z.100:1999, *Specification and description language (SDL).*

4 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

4.1 External definitions

This International Standard uses the following terms defined in other documents:

- Basic service (ITU-T Rec. I.210)
- Call (Basic call) (ISO/IEC 11574)
- PISN Number (ISO/IEC 11571)
- Private Integrated Services Network (PISN) (ISO/IEC 11579-1)
- Private Integrated services Network eXchange (PINX) (ISO/IEC 11579-1)
- Service (ITU-T Rec. I.112)
- Signalling (ITU-T Rec. I.112)
- Supplementary Service (ITU-T Rec. I.210)
- User (ISO/IEC 11574)

This International Standard refers to the following basic call Functional Entities (FE) defined in ISO/IEC 11574:

- Call Control (CC)
- Call Control Agent (CCA)

This International Standard refers to the following basic call inter-FE relationships defined in ISO/IEC 11574:

- r1
- r2
- r3

This International Standard refers to the following basic call information flows defined in ISO/IEC 11574:

- SETUP request/indication
- SETUP response/confirm
- RELEASE request/indication
- REPORT request/indication
- INFORMATION request/indication

This International Standard refers to the following service elements defined for basic call control in ISO/IEC 11574:

- Call History

4.2 Other definitions

4.2.1 Additional network feature (ANF) : A capability provided by a PISN, not generally directly to a user, over and above that of the Basic call.

4.2.2 Original Call, Original Connection : The call established between user A and user B.

4.2.3 New Call, New Connection : The new call established between user B and user C.

4.2.4 User A, Transferring User : The served user, i.e. the user requesting Single Step Call Transfer.

4.2.5 User B, Transferred User : The other user in user A's original call.

4.2.6 User C, Transferred-To User : The user to whom the call is transferred to.

5 List of acronyms

ANF	Additional Network Feature
CC	Call Control (Functional Entity)
CCA	Call Control Agent (Functional Entity)
FE	Functional Entity
FEA	Functional Entity Action
ISDN	Integrated Services Digital Network
PINX	Private Integrated services Network eXchange
PISN	Private Integrated Services Network
SDL	Specification and Description Language
SS	Supplementary Service
SS-SSCT	Supplementary Service Single Step Call Transfer
TE	Terminal Equipment

6 SS-SSCT stage 1 specification

6.1 Description

6.1.1 General description

SS-SSCT is a service which enables a served user (user A) to transfer an active call (with user B) to a user (user C) which has no call established either to user A or to user B. The active call can either be an incoming call to user A or an outgoing call from user A.

On successful completion of SS-SSCT user B and user C can communicate with each other and user A will no longer be involved in a call with user B or user C.

6.1.2 Qualifications on applicability to telecommunication services

SS-SSCT is applicable to all basic services defined in ISO/IEC 11574.

6.2 Procedure

6.2.1 Provision/withdrawal

SS-SSCT shall be generally available to all PISN users with the ability to invoke it.

6.2.2 Normal procedures

6.2.2.1 Activation, deactivation and interrogation

Not applicable.

6.2.2.2 Invocation and operation

User A, having an active call with user B, may invoke SS-SSCT to transfer the active call to a user (user C) which has no call established either to user A or to user B. The Original call can either be an incoming call to user A or an outgoing call from user A.

If, after invoking SS-SSCT, the number of the transferred-to user C supplied by user A is not complete, the transferred user B is requested to complete the number of the transferred-to user C.

It shall not be necessary to place the Original call on hold prior to invocation of SS-SSCT, although the call may be held. The result of successful SS-SSCT shall be a new call between the transferred user B and the transferred-to user C. Both users B and C may be informed of the transfer, and the name and the number of the other user if available and not subject to restriction. User A is no longer involved in the communication.

User A may decide when the original connection shall be released: either upon the new connection starting ringing or upon being through connected.

6.2.3 Exceptional procedures

6.2.3.1 Activation, deactivation, and interrogation

Not applicable.

6.2.3.2 Invocation and operation

SS-SSCT shall be rejected if the interconnection of user B and user C is not permitted. If the new call fails or if SS-SSCT is rejected user A shall be informed and the Original call between user A and user B shall be unaffected.

Failure of the new call also includes inter-digit timeout due to user B failing to complete the number of user C in a timely manner.

6.3 Interaction with other supplementary services and ANFs

Interactions with other supplementary services and ANFs for which PISN standards were available at the time of publication of this International Standard are specified below.

6.3.1 Calling Line Identification Presentation (SS-CLIP)

No interaction.

6.3.2 Connected Line Identification Presentation (SS-COLP)

No interaction.

6.3.3 Calling/Connected Line Identification Restriction (SS-CLIR)

User B's restriction requirements from the original call shall be used to restrict the presentation of user B's number to user C in a transferred call.

6.3.4 Calling Name Identification Presentation (SS-CNIP)

No interaction.

6.3.5 Calling Name Identification Restriction (SS-CNIR)

User B's restriction requirements from the original call shall be used to restrict the presentation of user B's name to user C in a transferred call.

6.3.6 Connected Name Identification Presentation (SS-CONP)

No interaction.

6.3.7 Completion of Call to Busy Subscriber (SS-CCBS)

No interaction.

6.3.8 Completion of Call on No Reply (SS-CCNR)

No interaction.

6.3.9 Call Transfer (SS-CT)

SS-SSCT shall not be initiated during SS-CT.

SS-CT shall not be initiated during SS-SSCT.

6.3.10 Call Forwarding Unconditional (SS-CFU)

The new call can be subject of call forwarding unconditional.

6.3.11 Call Forwarding Busy (SS-CFB)

The new call can be subject of call forwarding busy.

6.3.12 Call Forwarding No Reply (SS-CFNR)

The new call can be subject of call forwarding on no reply.

6.3.13 Call Deflection (SS-CD)

The new call can be subject of call deflection.

6.3.14 Path Replacement (ANF-PR)

No interaction.

NOTE 1 - Path Replacement may be invoked as a direct consequence of performing single step call transfer.

6.3.15 Call Offer (SS-CO)

No interaction.

6.3.16 Call Intrusion (SS-CI)

User A shall not be able to invoke SS-SSCT during the impending intrusion state or the intrusion state.

6.3.17 Do not Disturb (SS-DND)

No interaction.

6.3.18 Do not Disturb Override (SS-DNDO)

No interaction.

6.3.19 Advice of Charge (SS-AOC)**6.3.19.1 Advice of Charge: charging information at call set-up time (AOC-S)**

If, prior to transfer, user A was receiving AOC-S information for the original call, at the time of single step call transfer, SS-AOC-S shall be stopped. If at the time of the single step call transfer it is decided that user A will not be charged for the call prior to transfer, then the specific rate "free of charge from the beginning" shall be given to user A prior to stopping SS-AOC-S.

User A shall not be allowed to invoke SS-AOC-S on a call resulting from transfer.

After transfer, SS-AOC-S may be invoked for user B either automatically or on request from the user. It shall not be possible to invoke SS-AOC-S until after user C has answered. AOC-S information in that case may contain charges incurred prior to transfer (as specific rate "flat rate").

6.3.19.2 Advice of Charge: charging information during the call (AOC-D)

If, prior to transfer, user A was receiving AOC-D information for the original call, then at the time of transfer, the (sub)total charges shall be sent to user A and SS-AOC-D shall be stopped. If at the time of the transfer it is decided that user A will not be charged for the call prior to transfer, then the (sub)total charges sent to user A will have value "0" or "free of charge".

NOTE 2 - The charges will be total charges if user A is not charged for the call resulting from transfer and sub-total charges otherwise.

User A shall not be allowed to invoke SS-AOC-D on a call resulting from transfer.

After transfer SS-AOC-D may be invoked for user B (or C) either automatically or on request from the user. It shall not be possible to invoke SS-AOC-D until after user C has answered. If the user for which SS-AOC-D is invoked is to be charged for the call resulting from transfer, AOC-D information in that case may contain charges incurred prior to transfer.

6.3.19.3 Advice of Charge: charging information at the end of the call (AOC-E)

If, prior to transfer, user A was due to receive AOC-E information for the original call, and if user A continues to be charged for the call resulting from transfer, then at the time of transfer, as an implementation option, SS-AOC-E for user A may remain in progress. If SS-AOC-E remains in progress when the call resulting from transfer is released, AOC-E information (i.e. the total charges incurred for the call prior to transfer and for the call resulting from transfer) shall be sent to user A and AOC-E shall be stopped. If SS-AOC-E does not remain in progress, then at the time of transfer, user A shall be advised that final charge information is not available.

With the invocation of Call Transfer, user A may provide an identifier. If user A is to receive AOC-E information then, together with the AOC-E information, this identifier shall be returned by the PISN to user A.

If, prior to transfer, user A was due to receive AOC-E information for the original call, and if user A does not continue to be charged for the call resulting from transfer, then at the time of transfer, (i.e. when the call to user A is cleared) SS-AOC-E for user A shall be stopped and AOC-E information shall be sent to user A.

NOTE 3 - AOC-E information sent in this situation to user A can be either:

- the total charges incurred for the call prior to transfer (if user A is charged for that part of the call);
- total charges with value "0" or "free of charge" if at the time of the transfer the PISN decides that user B or user C is to be charged for the part of the call prior to transfer also.

User A shall not be allowed to invoke AOC-E only for the call resulting from transfer.

After transfer AOC-E may be invoked for user B (or C) either automatically or on request from the user. It shall not be possible to invoke SS-AOC-E until after user C has answered. If the user for which SS-AOC-E is invoked is to be charged for the call resulting from transfer, AOC-E information at the end of the call to user B (or C) may contain charges incurred prior to transfer.

6.3.20 Recall (SS-RE)

No interaction.

6.3.21 Call Interception (ANF-CINT)

A call resulting from transfer can be subject to interception if it continues to alert or wait on busy at the transferred-to user (user C) without reply.

6.3.22 Transit Counter (ANF-TC)

ANF-TC may apply to the establishment of the new connection during single step call transfer.

6.3.23 Route Restriction Class (ANF-RRC)

No interaction.

6.3.24 Message Waiting Indication (SS-MWI)

No interaction.

6.3.25 Wireless Terminal Location Registration (SS-WTLR)

No interaction.

6.3.26 Wireless Terminal Incoming Call (ANF-WTMI)

No interaction.

6.3.27 Wireless Terminal Outgoing Call (ANF-WTMO)

No interaction.

6.3.28 Wireless Terminal Authentication of a CTM User (SS-WTAT)

No interaction

6.3.29 Wireless Terminal Authentication of the PISN (SS-WTAN)

No interaction.

6.3.30 Private User Mobility Incoming Call (ANF-PUMI)

No interaction.

6.3.31 Private User Mobility Outgoing Call (ANF-PUMO)

No interaction.

6.3.32 Private User Mobility Registration (SS-PUMR)

No interaction.

6.3.33 Common Information (ANF-CMN)

No interaction.

NOTE 4 - ANF-CMN users involved in a call resulting from Single Step Call Transfer may exchange Common Information subsequent to transfer.

6.3.34 Call Priority Interruption (Protection) (SS-CPI(P))

No interaction.

6.4 Interworking considerations

The Single Step Call Transfer may take place when one or both of the calls involves interworking with a public ISDN or a public or private non-ISDN.

6.4.1 User B and/or User C in another network

Since the execution of the Single Step Call Transfer service need only involve the interconnection within the PISN of one end of each of the two connections (the original or/and the new call), the nature of the network (ISDN or non-ISDN) containing user B or user C makes no difference to the operation of the service as seen by user A.

The PISN shall pass on any notifications associated with the Single Step Call Transfer to the other network if the other network is capable of receiving this information, the possibilities being the notifications that Single Step Call Transfer has taken place, the name and number (if appropriate) of the other user and the other user's subaddress and compatibility information.

In the case where user B and user C are in the same network, the PISN may be able to co-operate with that network in order to effect Single Step Call Transfer in that network if that network supports a similar service (e.g. Call Transfer).

6.4.2 User A in another network

The PISN shall accept Single Step Call Transfer notifications from another network and pass them on to the PISN user. Single Step Call Transfer notifications include notifications that transfer has taken place, the name and number of the other user and the other user's subaddress and compatibility information. Where this information is not provided, a PISN user will have to rely on in-band information.

6.5 Overall SDL

Figure 1 contains the dynamic description of SS-SSCT using the Specification and Description Language (SDL) defined in ITU-T Rec. Z.100 (1993). The SDL process represents the behaviour of the PISN in providing SS-SSCT.

Input signals from the left and output signals to the left represent primitives from and to user A.

Input signals from the right and output signals to the right represent primitives from and to user B and user C.

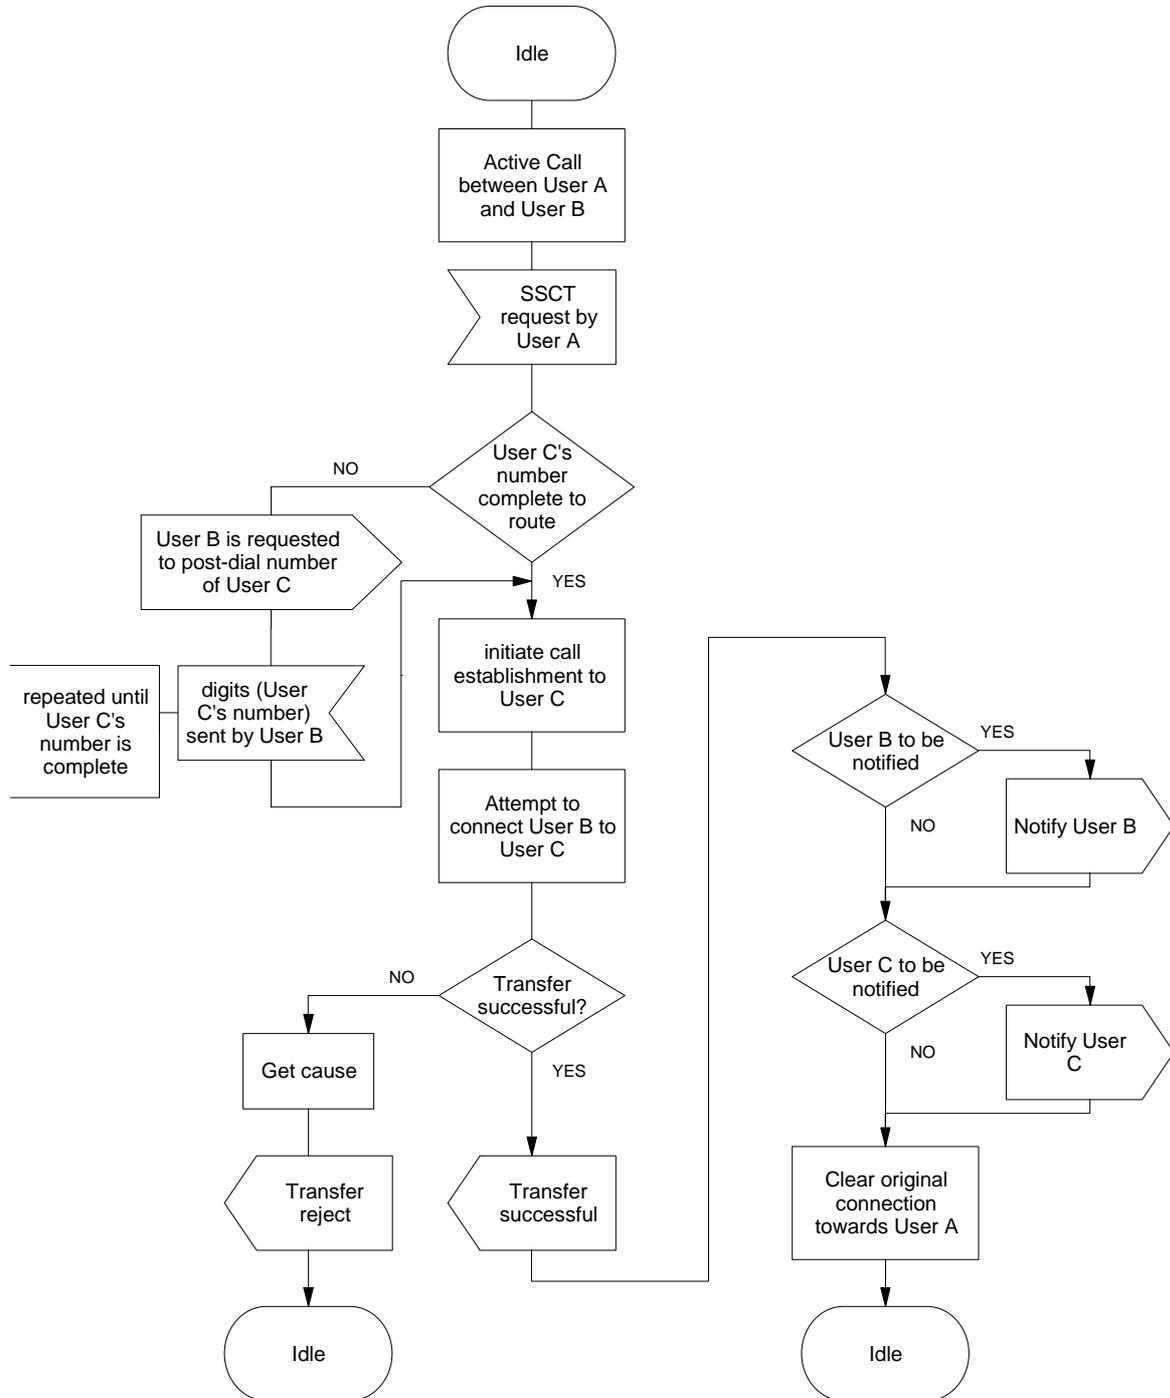


Figure 1 - SS-SSCT, Overall SDL

7 SS-SSCT stage 2 specification

A stage 3 standard for SS-SSCT shall be capable of supporting the functional breakdown of the service specified in this clause.

7.1 Functional model

7.1.1 Functional model description

The functional model shall comprise the following Functional Entities:

FE1	Single Step Transfer Invoke
FE2	Single Step Transfer Co-ordinate
FE3	Single Step Transfer Execute
FE4	Single Step Transfer Detection
FE5	Single Step Transfer Complete Receive
FE6	Single Step Transfer Notification Receive and Provision of complete transferred-to number
FE7	Single Step Transfer Notification Receive

The following functional relationships shall exist between these FEs:

rr	between FE1 and FE2
rs	between FE2 and FE3
rt	between FE3 and FE4
ru	between FE3 and FE5
rv	between FE5 and FE6
rw	between FE4 and FE7
rx	between FE6 and FE7

Figure 2 shows these FEs and relationships.

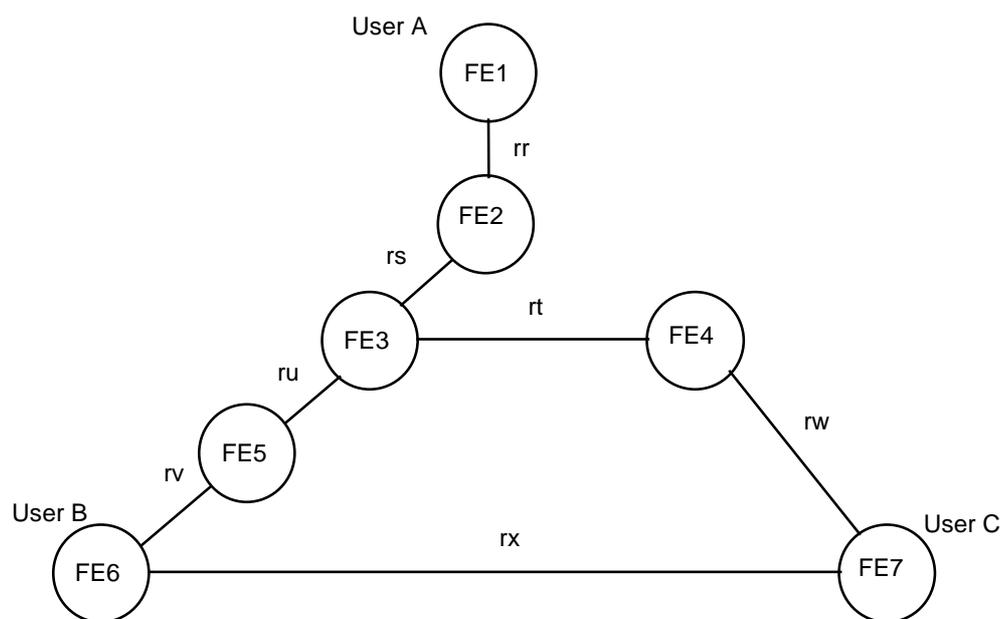


Figure 2 - Functional model of SS-SSCT

7.1.2 Description of functional entities

7.1.2.1 Single Step Transfer Invoke Functional Entity, FE1

This FE acts on behalf of user A. It is responsible for recognising user A's decision to effect Single Step Call Transfer.

7.1.2.2 Single Step Transfer Co-ordinate Functional Entity, FE2

This FE checks that details known concerning the original and the new call do not preclude the interconnection of user B and user C, and requests FE3 to execute the single step transfer.

7.1.2.3 Single Step Transfer Execute Functional Entity, FE3

This FE initiates the establishment of the new connection between user B and user C. On detection of an incomplete transferred-to number, it indicates this to FE5. On successful completion of the single step transfer it notifies FE5 of the fact that the single step transfer has occurred.

7.1.2.4 Single Step Transfer Detection Functional Entity, FE4

On successful completion of the single step transfer FE4 notifies FE7 of the fact that the single step transfer has occurred.

7.1.2.5 Single Step Transfer Complete Receive Functional Entity, FE5

This FE notifies FE6 that a transfer has occurred, along with the details of the new call. On indication from FE3 that the transferred-to number is incomplete, it requests FE6 to complete this number.

7.1.2.6 Single Step Transfer Notification Receive and Provision of complete transferred-to number Functional Entity, FE6

This FE receives on behalf of user B the indication that a single step transfer has occurred, and the details of the new call. This FE also passes to FE7 details relevant to the single step transfer which are not provided by the networks. On request from FE5 to complete the transferred-to number, this FE provides the complete transferred-to number.

7.1.2.7 Single Step Transfer Notification Receive Functional Entity, FE7

This FE receives on behalf of user C the indication that a single step transfer has occurred, and the details of the new call. This FE also passes to FE6 details relevant to the single step transfer which are not provided by the networks.

7.1.3 Relationship of functional model to Basic Call functional model

Functional Entity FE1 shall be collocated with user A's CCA, except where user A's terminal is stimulus with respect to single step transfer but functional with respect to the basic call, in which case FE1 shall be collocated with user A's CC.

Functional Entity FE2 shall be collocated with user A's CC.

Functional Entity FE3 shall be collocated with user A's CC, with any Transit CC, or with user B's CC.

Functional Entity FE4 shall be collocated with user C's CC.

Functional Entity FE5 shall be collocated with user B's CC.

Functional Entity FE6 shall be collocated with user B's CCA, except where user B's terminal is stimulus with respect to single step transfer but functional with respect to the basic call, in which case FE6 shall be collocated with user B's CC.

Functional Entity FE7 shall be collocated with user C's CCA, except where user C's terminal is stimulus with respect to single step transfer but functional with respect to the basic call, in which case FE7 shall be collocated with user B's CC.

An example of a relationship between the FEs for SS-SSCT and FEs for the basic call is shown in figure 3.

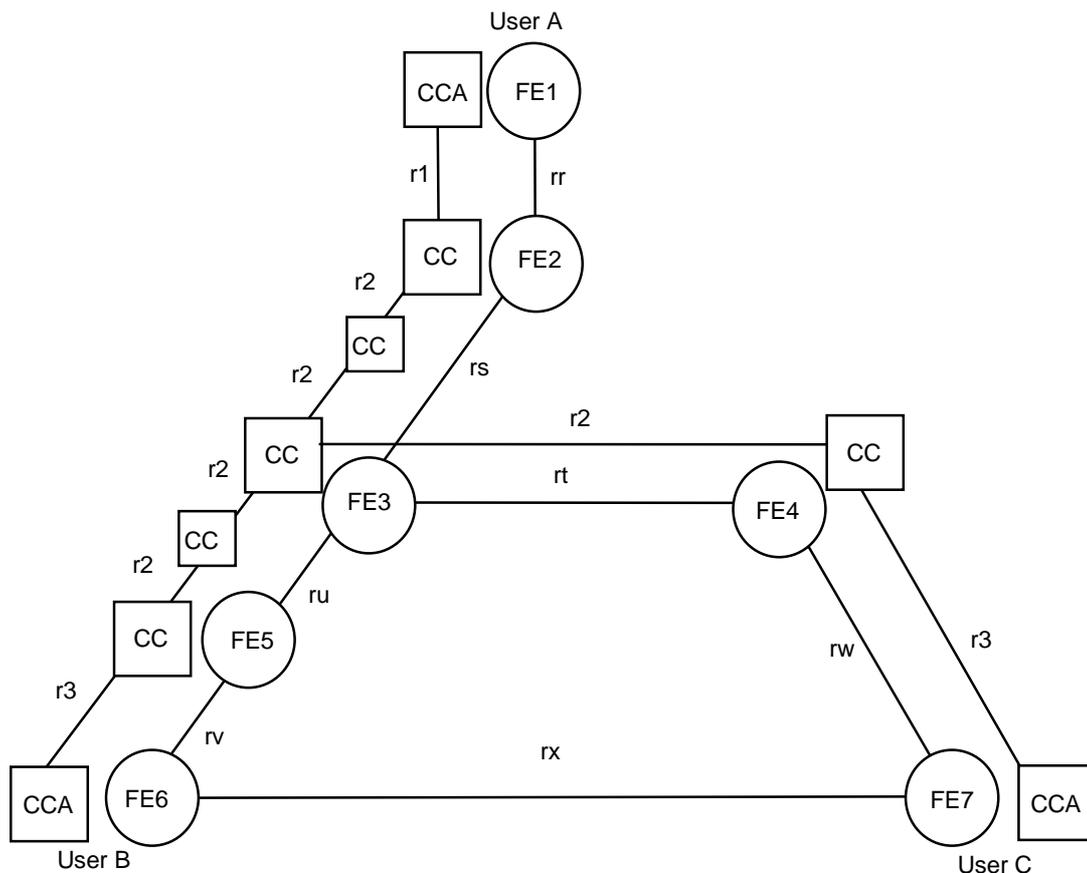


Figure 3 - Example Relationship between Model for SS-SSCT and Basic Call

7.2 Information flows

7.2.1 Definition of information flows

In the tables listing the elements in information flows, the column headed "Request" indicates which of these elements are mandatory (M) and which are optional (O) in a request/indication information flow, and the column headed "Confirm" indicates which of these elements are mandatory (M) and which are optional (O) in a response/confirmation information flow.

7.2.1.1 Single Step Call Transfer Invoke

This is a confirmed information flow across rr from FE1 to FE2 which initiates a single step call transfer.

Table 1 lists the service elements within the Single Step Call Transfer Invoke information flow.

Table 1 - Content of Single Step Call Transfer Invoke

Service element	Request	Confirm
Transfer Invoke Result	-	M
Transferred-to Number	M	-

Service element Transferred-to Number shall contain a number which will enable the new connection to be routed to FE4. The Transferred-to Number can be incomplete (post-dialing is required).

Service element Transfer Invoke Result contains the result of the single step call transfer invoke request and, if it indicates rejection, identifies the reason for rejection. An indication of rejection means that the original call has not been affected by the invocation request. An indication of acceptance means that the single step call transfer has been effected and that users B and C are now involved in the same call, without the involvement of user A.

7.2.1.2 Single Step Call Transfer Initiate

This is a confirmed information flow across rs from FE2 to FE3 which determines the ability of FE3 to participate in the single step call transfer and, if so, to set up a call using the information which was provided by FE2.

Table 2 lists the service elements within the Single Step Call Transfer Initiate information flow.

Table 2 - Content of Single Step Call Transfer Initiate

Service element	Request	Confirm
Transferred-to Number	M	-
Transferred Address	M	-
Transferring Address	O	-
Await Connect	O	-
Transferred Name	O	-
Transferring Name	O	-
Transfer Initiate Result	-	M

Service element Transferred-to Number shall contain a number which will enable the new connection to be routed to FE4. The Transferred-to Number can be incomplete (post-dialing is required).

Service element Transferred Address shall contain the address of the transferred user which shall be routed to FE4.

Service element Transferring Address if present shall contain the address of the transferring user which routes the new connection to FE4.

Service element Await Connect if present shall contain the indication when the original call shall be released.

Service elements Transferred Name and Transferring Name may be omitted in case of name not available or in case of presentation restricted or not implemented.

Service element Transfer Initiate Result shall contain the result of the transfer initiate request, and if it indicates rejection, then it shall identify the reason for rejection. Rejection may occur if the new connection cannot be established, e.g. because of congestion.

7.2.1.3 Single Step Call Transfer Setup

This unconfirmed flow across rt from FE3 to FE4 is associated with a "basic call" Setup Information flow for the new call using the Transferred-to Number provided by FE2.

Table 3 lists the service elements within the Single Step Call Transfer Setup information flow.

Table 3 - Content of Single Step Call Transfer Setup

Service element	Request
Transferring Address	O
Transferring Name	O

Service element Transferring Address if present shall contain the address of the user which routes the new connection to FE4.

Service element Transferring Name if present shall contain the name of the user which routes the new connection to FE4.

7.2.1.4 Single Step Call Transfer Post Dial

This is an unconfirmed flow across ru from FE3 to FE5 which indicates to FE5 that the transferred-to number is incomplete.

There are no service elements in this information flow.

7.2.1.5 Single Step Call Transfer Digit Info

This is an unconfirmed flow across ru from FE5 to FE3 which provides to FE3 the transferred-to number.

Table 4 lists the service elements within the Single Step Call Transfer Digit Info information flow.

Table 4 - Content of Single Step Call Transfer Digit Info

Service element	Request
Transferred-to Number	O
Sending Complete Indicator	O

Service element Transferred-to Number if present shall contain the digits of the transferred-to number so far available. The remaining part of the transferred-to number will be sent by repeating the single step call transfer digit info flow.

Service element Sending Complete Indicator if present shall contain the indication that the number is complete.

7.2.1.6 Single Step Call Transfer Post Dial Request

This is an unconfirmed flow across rv from FE5 to FE6 which indicates to FE6 that the transferred-to number is incomplete.

There are no service elements in this information flow.

7.2.1.7 Digit Indication

This is an unconfirmed flow across rv from FE6 to FE5 which conveys the digits to complete the transferred-to number.

Table 5 lists the service elements within the Digit Indication information flow.

Table 5 - Content of Single Step Call Transfer Digit Indication

Service element	Request
Digits	O

Service element Digits shall comprise the remaining digits to complete the transferred-to number.

7.2.1.8 Transfer Notify

This is an unconfirmed flow across rv from FE5 to FE6 and across rw from FE4 to FE7 which informs users of the successful completion of a Single Step Call Transfer, and appropriate details of the other user. It can be repeated to provide further information about the single step transfer that has already been notified.

Table 6 lists the service elements within the Single Step Transfer Notify information flow.

Table 6 - Content of Single Step Transfer Notify

Service element	Request
Call History	O
Connected Name	O
Connected Subaddress	O
Terminal Details Request	O

Service element Call History is described in ISO/IEC 11574.

Service element Connected Name shall comprise the elements of information flow INFORM4 of ISO/IEC 13864.

Service element Connected Subaddress shall be as defined in ISO/IEC 14136 and shall be included only when available from information flow Transfer Active.

Service element Terminal Details Request shall be included if FE6 or FE7 is to be invited to send the Terminal Details information flow.

7.2.1.9 Terminal Details

This is an unconfirmed information flow across rx from FE6 to FE7 or vice versa which allows the swapping of information between the users involved in the new call where such information is not necessarily stored by the network.

Table 7 lists the service elements within the Terminal Details information flow.

Table 7 - Content of Terminal Details

Service element	Request
Connected Subaddress	O

Service element Connected Subaddress is described in ISO/IEC 14136.

7.2.1.10 Transfer Complete

This is an unconfirmed information flow across ru from FE3 to FE5 which indicates that a transfer has been effected.

For the service elements within the Transfer Complete information flow refer to ISO/IEC 13865.

7.2.1.11 Transfer Active

This is an unconfirmed information flow across ru from FE3 to FE5 which indicates that answer has taken place following an alerting transfer.

For the service elements within the Transfer Active information flow refer to ISO/IEC 13865.

7.2.1.12 Transfer Update

This is an unconfirmed flow across rt and ru which allows user B's FE5 and user C's FE4 to inform each other of all details about the transferred users that are known to the network if user C's number is known.

For the service elements within the Transfer Update information flow refer to ISO/IEC 13865.


7.2.2 Examples of information flow sequences

Below are examples of typical sequences of information flows. In addition to providing signalling procedures in support of these sequences, a stage 3 standard shall also cover other sequences arising from error situations, interactions with basic call, interactions with other supplementary services, different topologies, etc.

In the figures, SS-SSCT information flows are represented by solid arrows and basic call information flows are represented by broken arrows. An ellipse embracing two information flows indicates that the two information flows occur simultaneously. Within a column representing an SS-SSCT functional entity, the numbers refer to functional entity actions listed in 7.3.

7.2.2.1 Successful Single Step Call Transfer, transfer occurs on active new call

Figure 4 shows the information flow sequence for normal operation of SS-SSCT when transfer occurs on active new call.

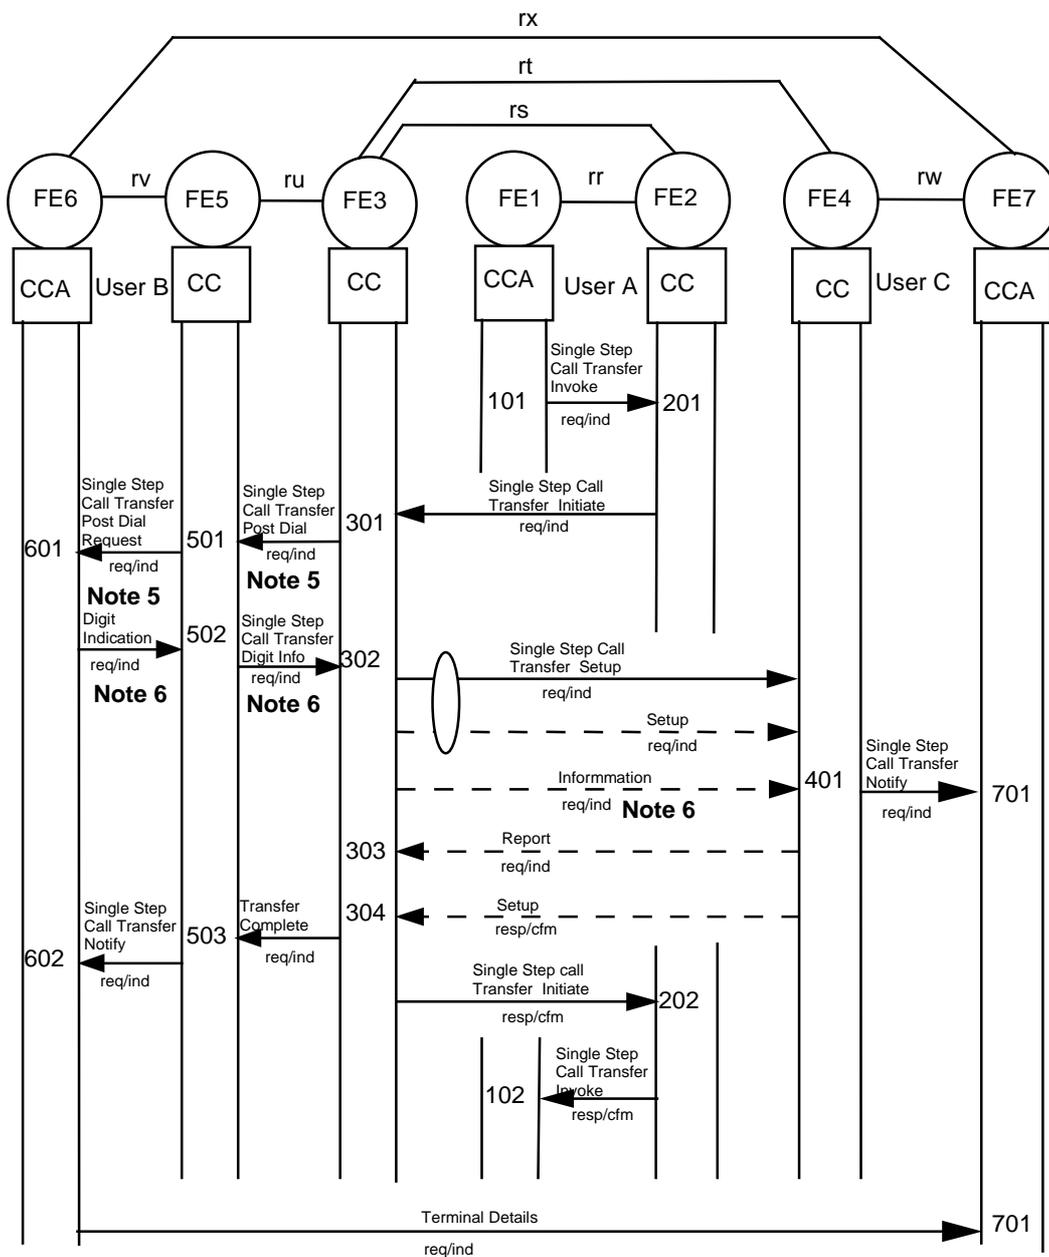

NOTE 5 - This information flow is sent only in case of incomplete transferred-to number.

NOTE 6 - This information flows are sent only in case of incomplete transferred-to number. These actions may be repeated until the whole transferred-to number has been sent.

Figure 4 - Information Flow Sequence - Normal Operation of SS-SSCT, transfer occurs on active new call

The Terminal Details flow is optional. If it occurs it may occur in either or both directions and is initiated on receipt of a Single Step Transfer Notify containing element Terminal Details Request.

7.2.2.2 Successful Single Step Call Transfer, transfer occurs on alerting new call

Figure 5 shows the information flow sequence for normal operation of SS-SSCT when transfer occurs on alerting new call.


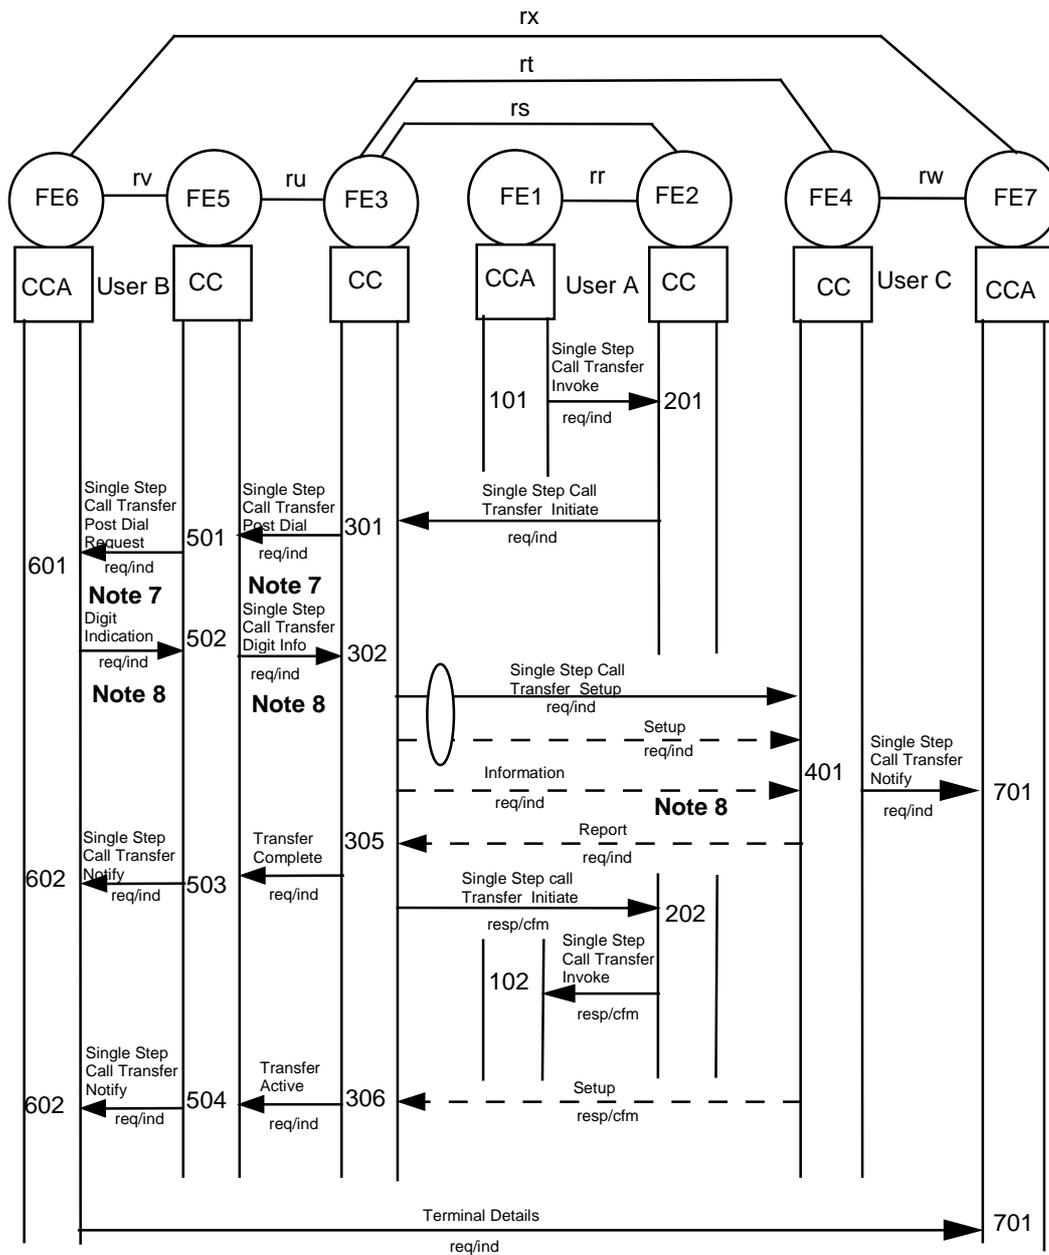


Figure 5 - Information Flow Sequence - Normal Operation of SS-SSCT, transfer occurs on alerting new call

The Terminal Details flow is optional. If it occurs it may occur in either or both directions and is initiated on receipt of a Single Step Transfer Notify containing element Terminal Details Request.

7.2.2.3 Unsuccessful Single Step Call Transfer (setup fails)

Figure 6 shows the information flow sequence for unsuccessful operation of SS-SSCT when basic call does not reach user C's PINX owing to congestion.

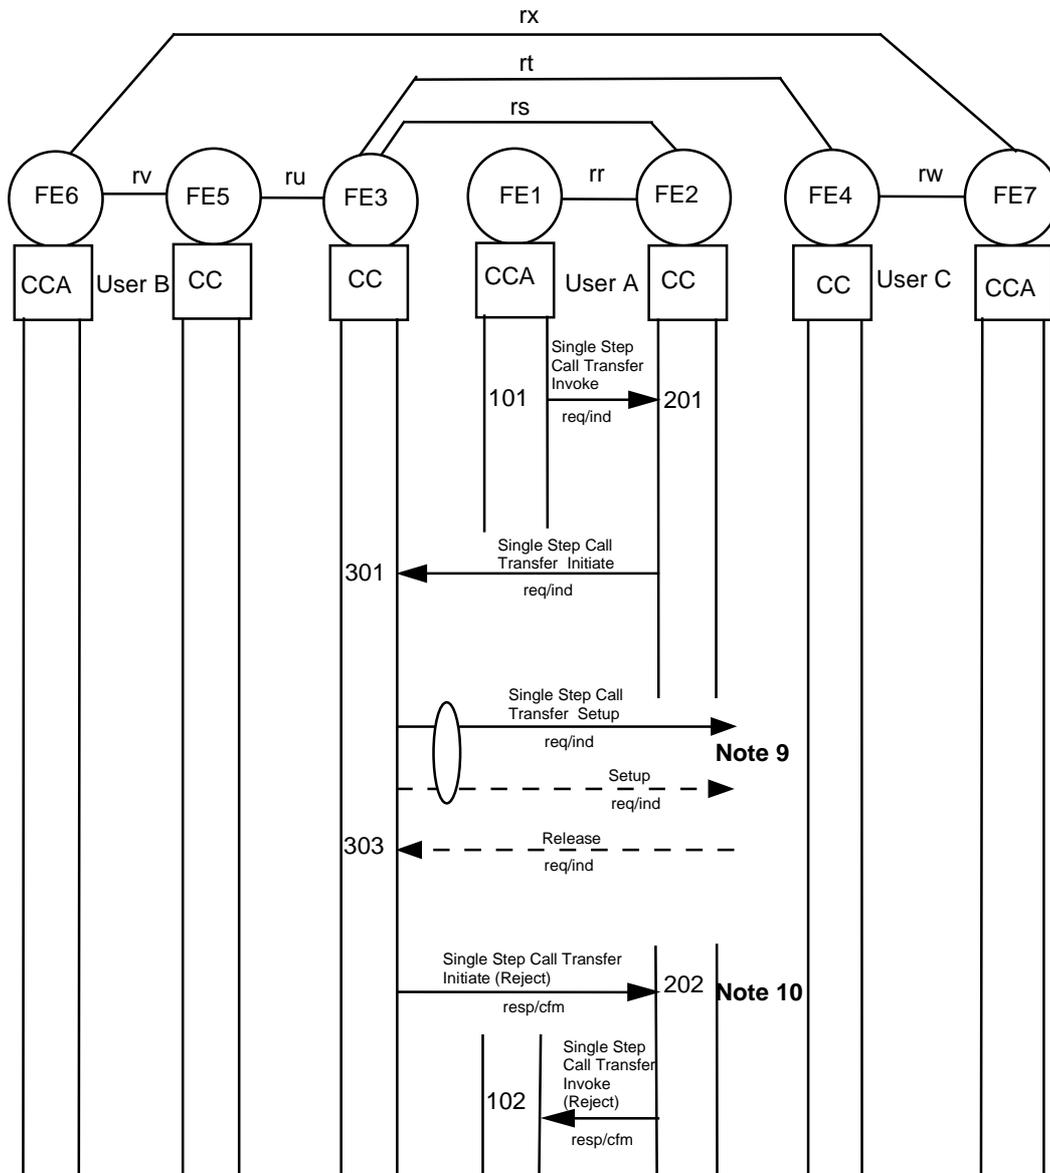

NOTE 9 - Basic call does not reach user C's PINX owing to congestion.

NOTE 10 - If single step call transfer fails, the original call shall continue.

Figure 6 - Information Flow Sequence - Unsuccessful Operation of SS-SSCT (call setup fails)

7.3 Functional Entity actions

The following FE actions shall occur at the points indicated in the figures of 7.2.2.

7.3.1 Functional Entity actions of FE1

- 101 FE1 detects the user request for single step call transfer. Local checks on the suitability of the transfer may be made and the request rejected on the basis of such checks. If the single step call transfer is not barred locally, a Single Step Call Transfer Invoke request is sent to FE2.
- 102 On receipt of the Single Step Call Transfer Invoke confirmation, FE1 informs the user of the result, and in the case of successful completion, it may release the original call if it has not yet been released.

7.3.2 Functional Entity actions of FE2

- 201 On receipt of a Single Step Call Transfer Invoke indication from FE1, FE2 identifies the original call and checks the validity of the request from the network's point of view.
- If the single step call transfer is found to be valid, a Single Step Call Transfer Initiate request is sent to FE3.
- If the single step call transfer is found to be invalid, a Single Step Call Transfer Invoke response is sent to FE1 indicating rejection.
- 202 On receipt of the Single Step Call Transfer Initiate confirmation from FE3, a Transfer Invoke response is sent to FE1 if FE3 indicates successful completion of the single step call transfer. If FE3 has been unable to complete the single step call transfer, the original call continues.

7.3.3 Functional Entity actions of FE3

- 301 On receipt of a Single Step Call Transfer Initiate indication from FE2, FE3 determines whether or not it can participate in the single step call transfer. If FE3 is not able to participate in the single step call transfer, a response indicating rejection is returned to FE2. Additionally FE3 checks if the received transferred-to number is complete. If the transferred-to number is not complete, a Single Step Call Transfer Post Dial indication is sent to FE5 and if a part of the transferred-to number is available and sufficient to route, a Single Step Call Transfer Setup request is sent to FE4 associated with a basic call request. Otherwise if the transferred-to number is complete a Single Step Call Transfer Setup request is sent to FE4 associated with a basic call request.
- 302 On receipt of one or more Single Step Call Transfer Digit Info indication(s) from FE5 and if no new call is established with FE4 and the transferred-to number is sufficient to route, a Single Step Call Transfer Setup request is sent to FE4 associated with a basic call request. Otherwise if a call is already established with FE4, a Information request with further digit(s) of the transferred-to number is sent to FE4. This action is repeated until the whole transferred-to number has been sent.
- 303 If the Service Element Await Connect of the Single Step Call Transfer Initiate indicated that the call shall be released after receipt of a Setup confirmation, then on receipt of a Report indication from FE4 no further action will be taken and the Setup confirmation of the new connection is awaited.
- 304 If the action described in 303 above applies, upon receipt of a Setup confirmation from FE4 the new connection is joined to the part of the original call towards user B, a response indicating successful completion is sent to FE2, the part of the original call towards user A is released and a Transfer Complete indication with callStatus "answered" is sent to FE5.
- 305 If the Service Element Await Connect of the Single Step Call Transfer Initiate indicated that the call shall be released after receipt of a Report indication, then on receipt of a Report indication from FE4 the new connection is joined to the part of the original call towards user B, a response indicating successful completion is sent to FE2, the part of the original call towards user A is released. and a Transfer Complete indication with callStatus "alerting" is sent to FE5. If instead the basic call associated with the Single Step Call Transfer Setup request fails, the Single Step Call Transfer Initiate is rejected and FE3 takes no further part in the Single Step Call Transfer.
- 306 If the action described in 305 above applies, upon receipt of a Setup confirmation from FE4 a Transfer Active indication is sent to FE5. If instead no Setup Confirmation is received, the connection towards user A is released.

7.3.4 Functional Entity actions of FE4

- 401 On receipt of the Single Step Call Transfer Setup indication from FE3 and in case of overlap sending upon completion of the transferred-to number, either a basic call alerting or a basic call connect indication is returned to FE3, and a Single Step Call Transfer Notify request is sent to the FE7. The Single Step Call Transfer Notify contains element Terminal Details Request unless it is sent to a user C that has not answered.

7.3.5 Functional Entity actions of FE5

- 501 On receipt of a Single Step Call Transfer Post Dial indication from FE3 a Single Step Call Transfer Post Dial request is sent to the associated FE6.
- 502 On receipt of the digits from FE6 one or more Single Step Call Transfer Digit Info indication(s) is (are) sent to FE3.
- 503 On receipt of a Transfer Complete indication from FE3, a Single Step Call Transfer Notify request is sent to the associated FE6 and details relevant to the network concerning the new user (user C) in the call may be stored.
- 504 On receipt of a Transfer Active indication from FE3, a Single Step Call Transfer Notify request is sent to the associated FE6.

7.3.6 Functional Entity actions of FE6

- 601 On receipt of a Single Step Call Transfer Post Dial request, FE6 sends digits to complete the transferred-to number to FE5.
- 602 On receipt of a Single Step Call Transfer Notify indication from FE5 or a Terminal Details indication from FE7, relevant details may be stored. In the case of receipt of a Single Step Call Transfer Notify indication containing element Terminal Details Request, a Terminal Details request may be sent to FE7 if appropriate.

7.3.7 Functional Entity actions of FE7

- 701 On receipt of a Single Step Call Transfer Notify indication from FE4 or a Terminal Details indication from FE6, relevant details may be stored. In the case of receipt of a Single Step Call Transfer Notify indication containing element Terminal Details Request, a Terminal Details request may be sent to FE6 if appropriate.

7.4 Functional Entity behaviour

The FE behaviours shown below are intended to illustrate typical FE behaviour in terms of information flows sent and received.

The behaviour of each FE is shown using the Specification and Description Language (SDL) defined in ITU-T Rec. Z.100.

7.4.1 Behaviour of FE1

Figure 7 shows the normal behaviour of FE1. Input signals from the left and output signals to the left represent primitives from and to user A. Input signals from the right and output signals to the right represent information flows from and to FE2.

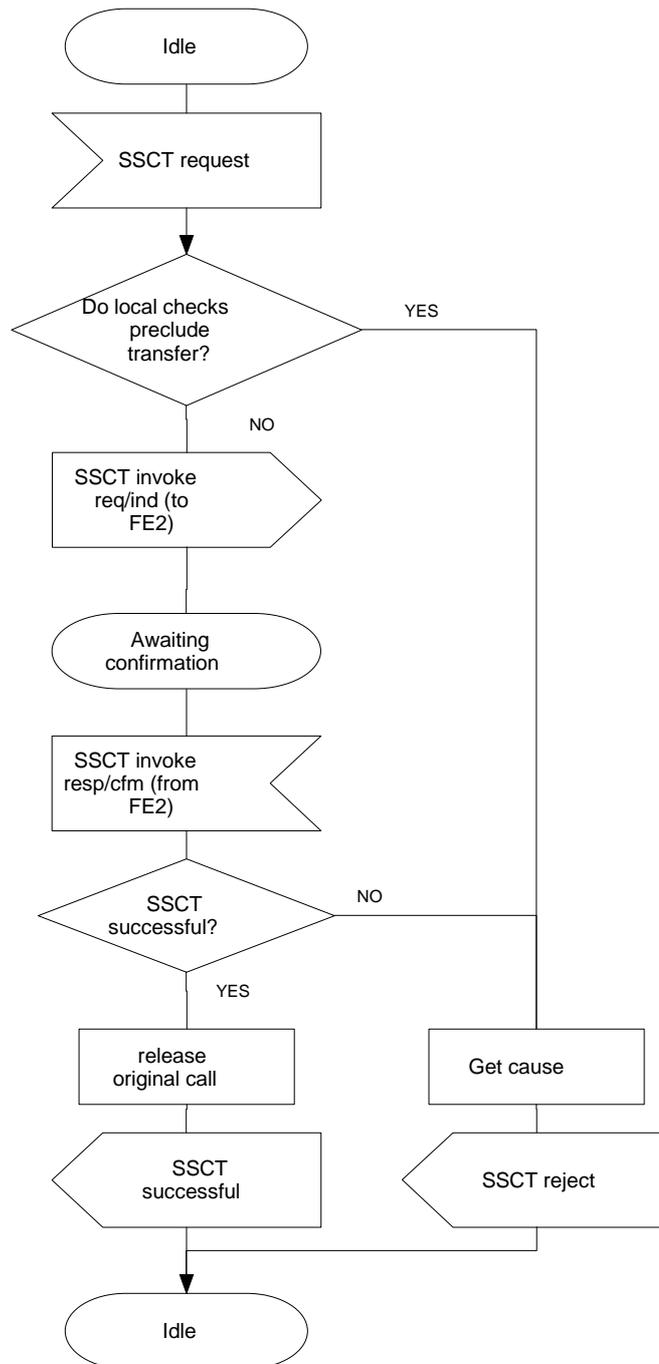


Figure 7 - SS-SSCT, SDL for functional entity FE1

7.4.2 Behaviour of FE2

Figure 8 shows the normal behaviour of FE2. Input signals from the left and output signals to the left represent information flows from and to FE1. Input signals from the right and output signals to the right represent information flows from and to FE3.

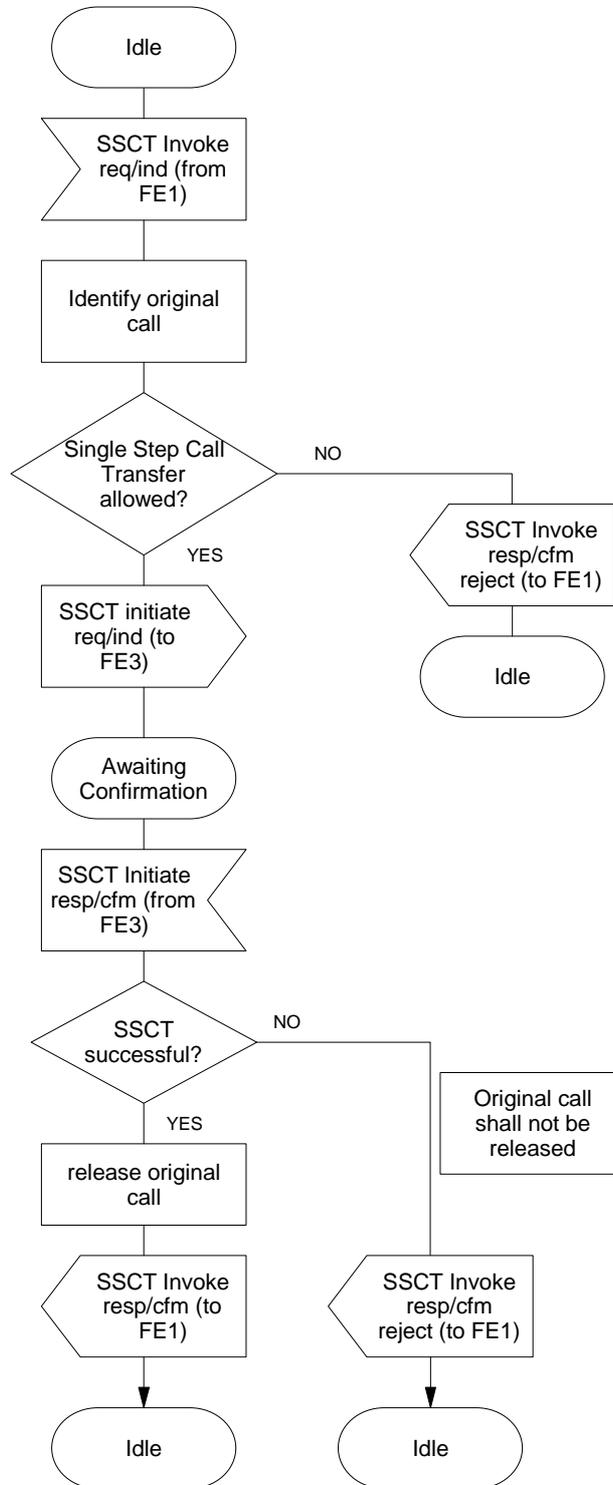


Figure 8 - SS-SSCT, SDL for Functional Entity FE2

7.4.3 Behaviour of FE3

Figure 9 shows the normal behaviour of FE3. Input signals from the left and output signals to the left represent information flows from and to FE5. Input signals from the right and output signals to the right represent information flows from and to FE4 and FE2 and basic call CCs collocated with FE4.

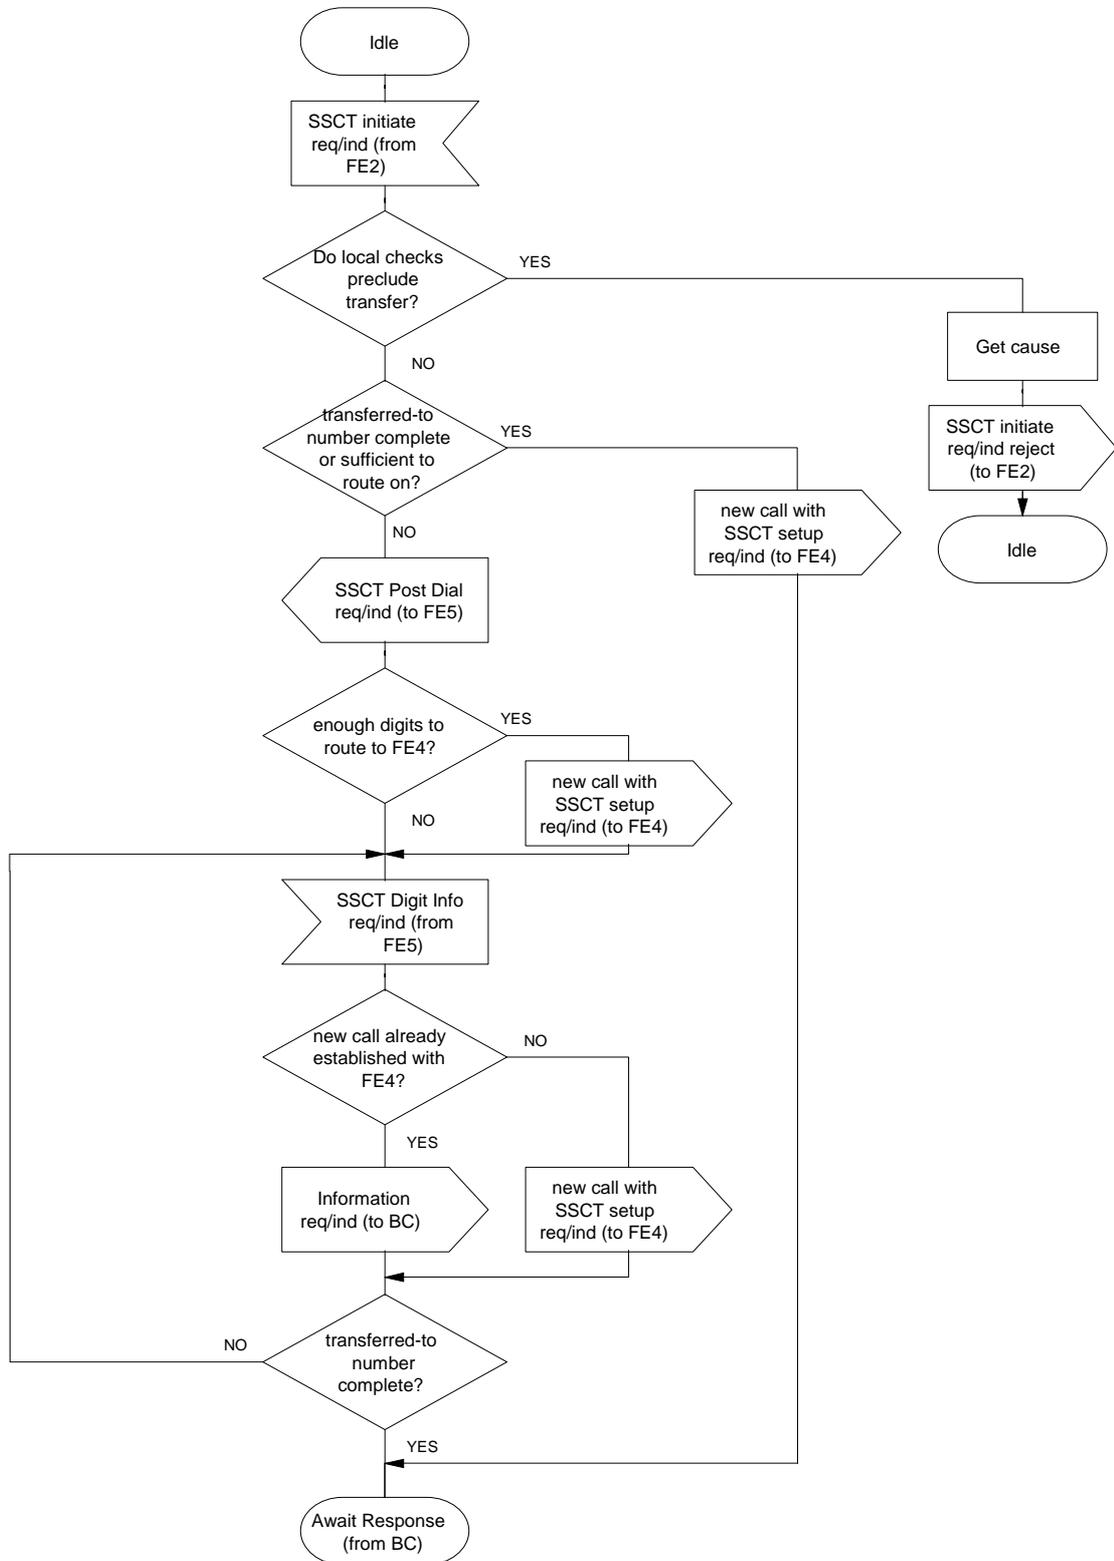


Figure 9 (sheet 1 of 2) - SS-SSCT, SDL for Functional Entity FE3

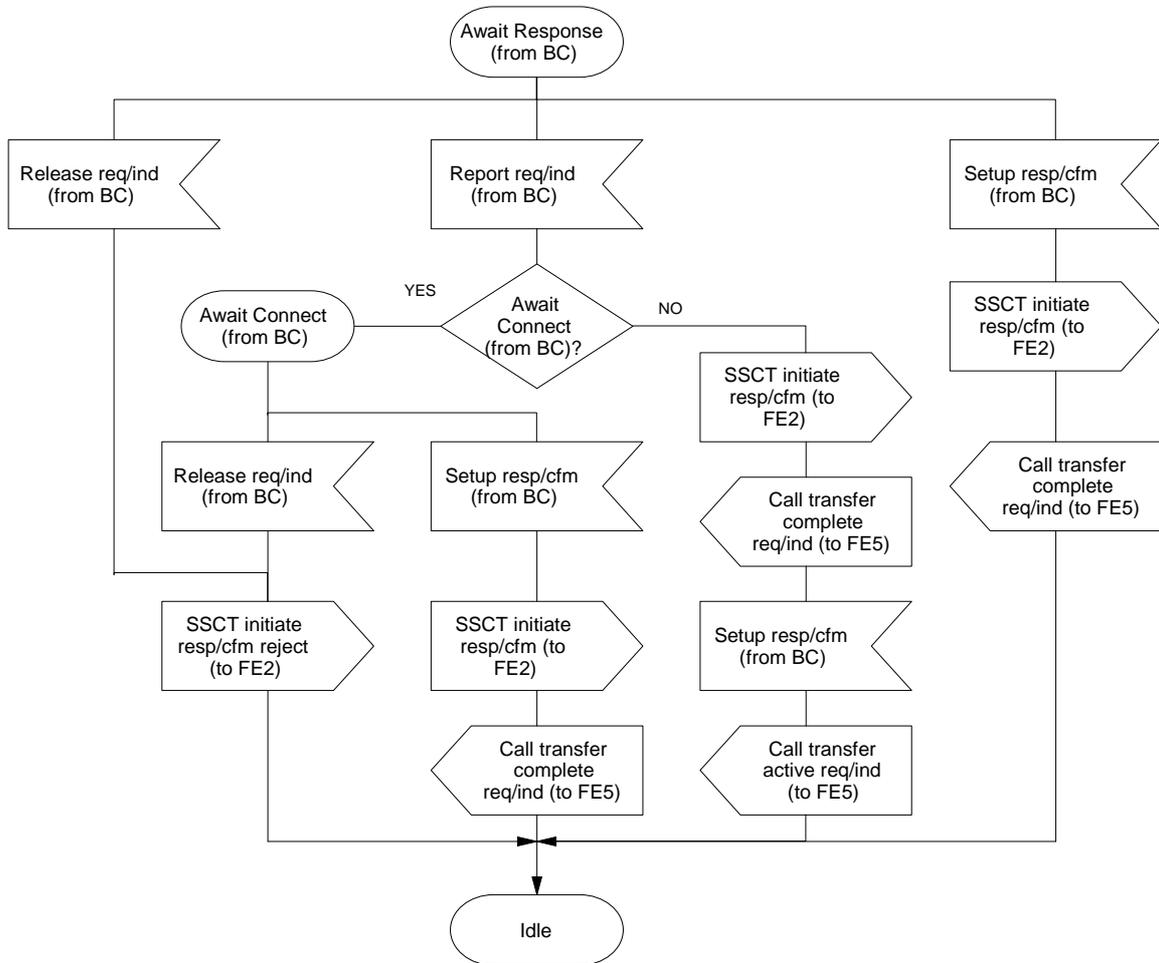


Figure 9 (sheet 2 of 2) - SS-SSCT, SDL for Functional Entity FE3

7.4.4 Behaviour of FE4

Figure 10 shows the normal behaviour of FE4. Input signals from the left and output signals to the left represent information flows from and to FE7. Input signals from the right and output signals to the right represent information flows from and to FE3 and basic call CCs collocated with FE3

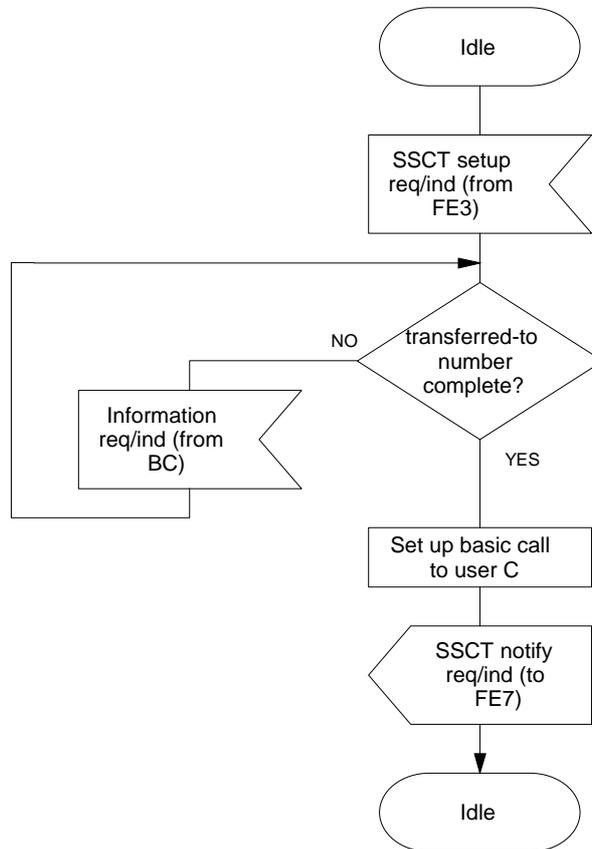


Figure 10 - SS-SSCT, SDL for Functional Entity FE4

7.4.5 Behaviour of FE5

Figure 11 shows the normal behaviour of FE5. Input signals from the left and output signals to the left represent information flows from and to FE6. Input signals from the right and output signals to the right represent information flows from and to FE3.

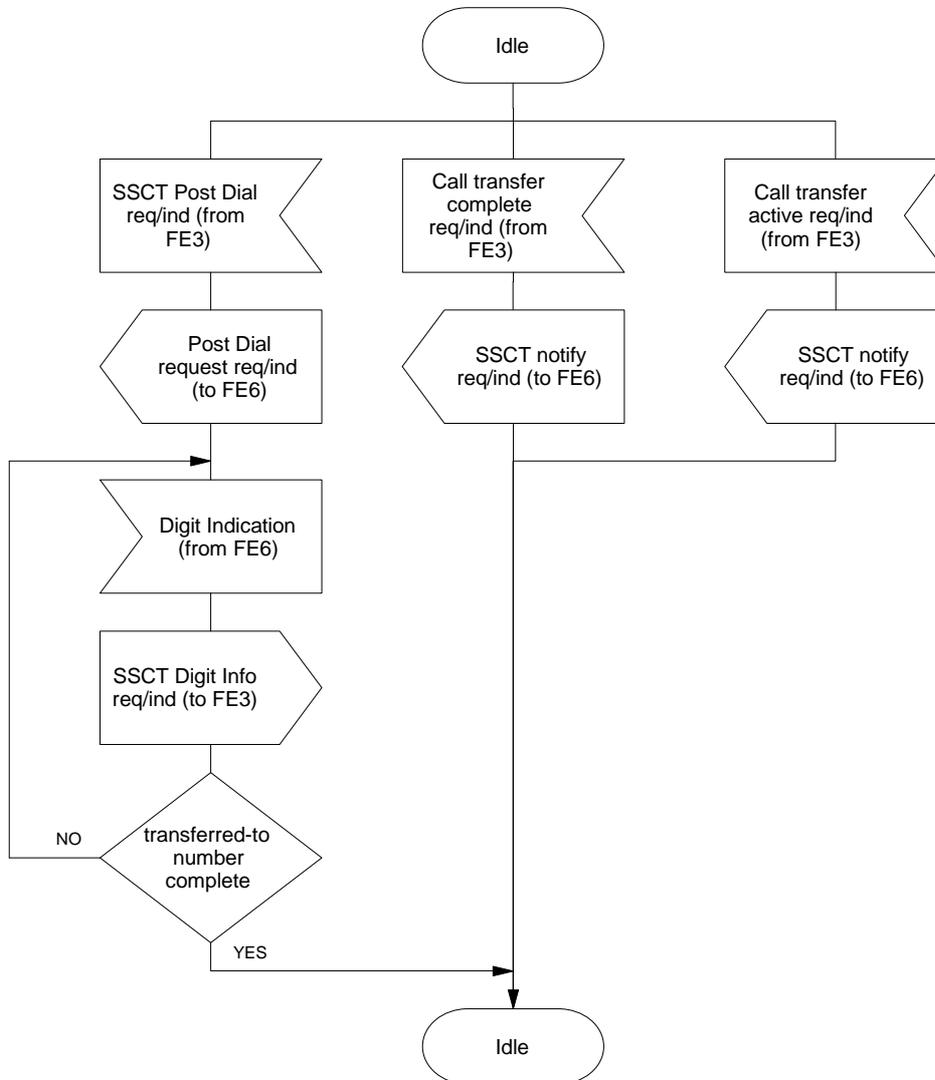


Figure 11 - SS-SSCT, SDL for Functional Entity FE5

7.4.6 Behaviour of FE6

Figure 12 shows the normal behaviour of FE6. Input signals from the left and output signals to the left represent primitives from and to user B. Input signals from the right and output signals to the right represent information flows from and to other FEs.

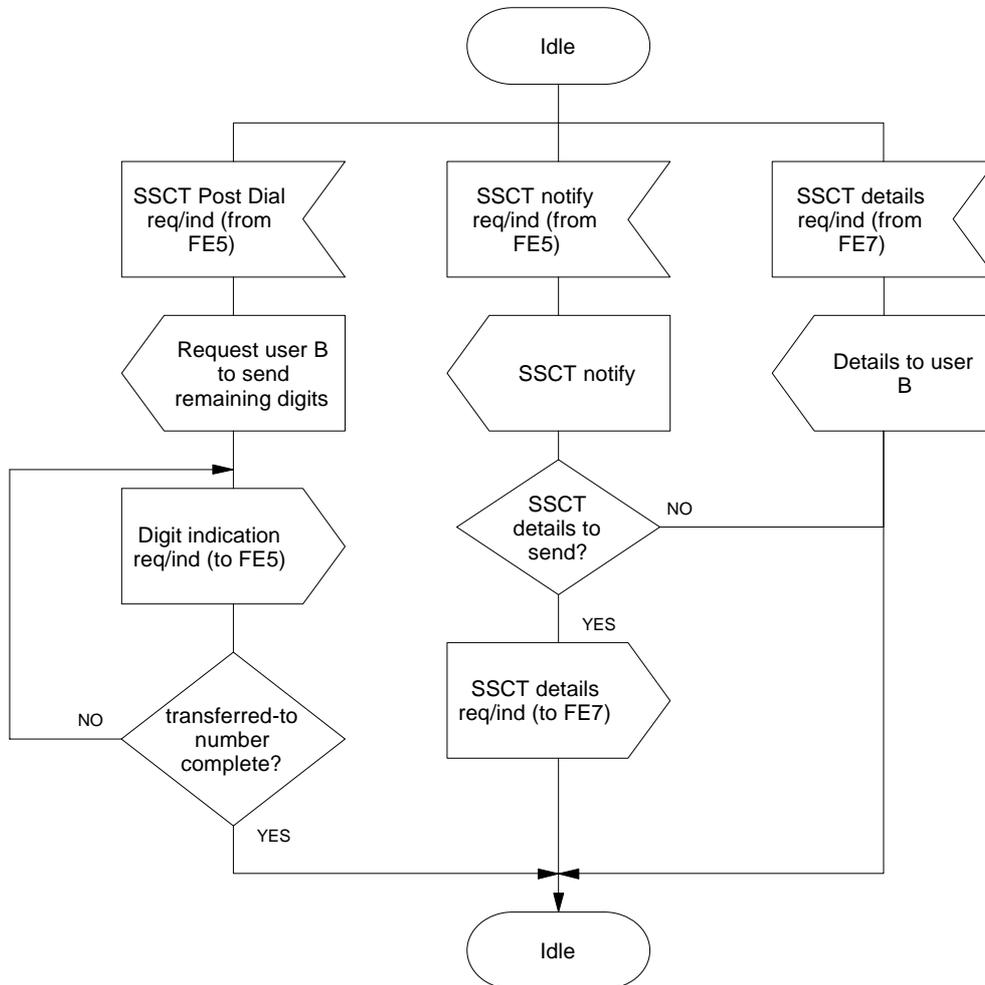


Figure 12 - SS-SSCT, SDL for Functional Entity FE6

7.4.7 Behaviour of FE7

Figure 13 shows the normal behaviour of FE7. Input signals from the left and output signals to the left represent primitives from and to user C. Input signals from the right and output signals to the right represent information flows from and to other FEs.

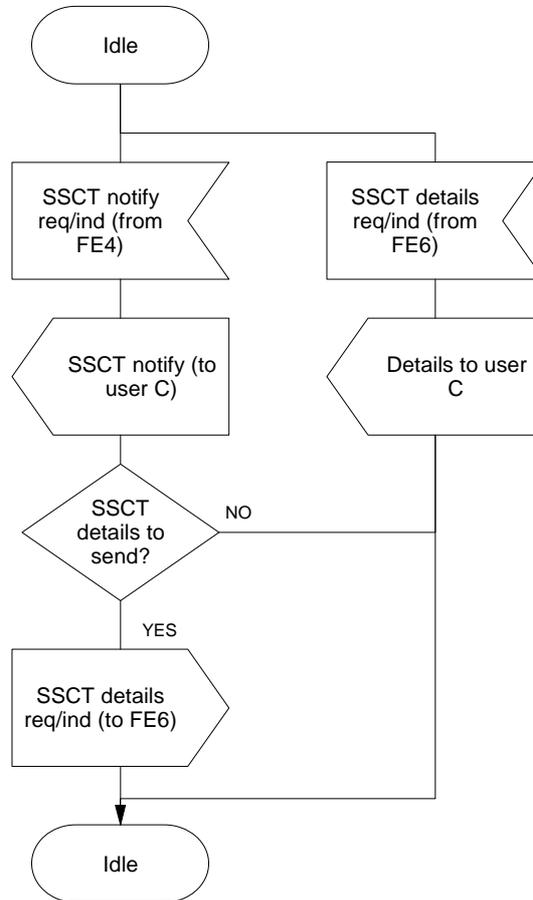


Figure 13 - SS-SSCT, SDL for Functional Entity FE7

7.5 Allocation of functional entities to physical locations

Table 8 illustrates the various scenarios possible, excluding the cases of stimulus terminals. Where a terminal involved is stimulus with respect to transfer, any FE shown as residing in the corresponding user's TE shall reside instead in that user's PINX.

Table 8 - FE location scenarios

Scenarios	Functional Entities						
	User A FE1	User A FE2	FE3	User C FE4	User C FE7	User B FE5	User B FE6
Scenario 1	TE	PINX	PINX	PINX	TE	PINX	TE
Scenario 2	TE	PINX	PINX	other network	other network	PINX	TE
Scenario 3	TE	PINX	PINX	PINX	TE	other network	other network
Scenario 4	TE	PINX	PINX	other network	other network	other network	other network
Scenario 5	TE	PINX	other network	PINX	TE	other network	other network
Scenario 6	TE	PINX	other network				
Scenario 7	other network	other network	other network	PINX	TE	other network	other network
Scenario 8	other network	other network	other network	other network	other network	PINX	TE
Scenario 9	other network	other network	PINX	other network	other network	PINX	TE
Scenario 10	other network	other network	PINX	PINX	TE	PINX	TE
Scenario 11	other network	other network	other network	PINX	TE	PINX	TE

Annex A

(informative)

Difference between Single Step Call Transfer and Call Transfer by Rerouting

The Single Step Call Transfer supplementary service is a service which enables a transferring user to replace an existing call with a transferred user by a new call between transferred user and transferred-to user whereby the transferring user does not have a call established with the transferred-to user prior to that single step call transfer. The single step call transfer executing entity which reroutes the transferred user to the transferred-to user is located in the call path between the transferring user and the transferred user.

The Call Transfer by Rerouting supplementary service (ISO/IEC 13865, ISO/IEC 13869) is a service which enables a transferring user to transform two of that users calls into a new call between the transferred user and the transferred-to user. The call transfer executing entity which reroutes the transferred user to the transferred-to user is prescribed to be the entity nearest to the transferred user.

