

ISO/IEC 11801-6

Edition 1.0 2017-11


INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES

Part 6: Distributed building services

CORRIGENDUM 1

Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25

Replace the figure graphic with the following new figure graphic:

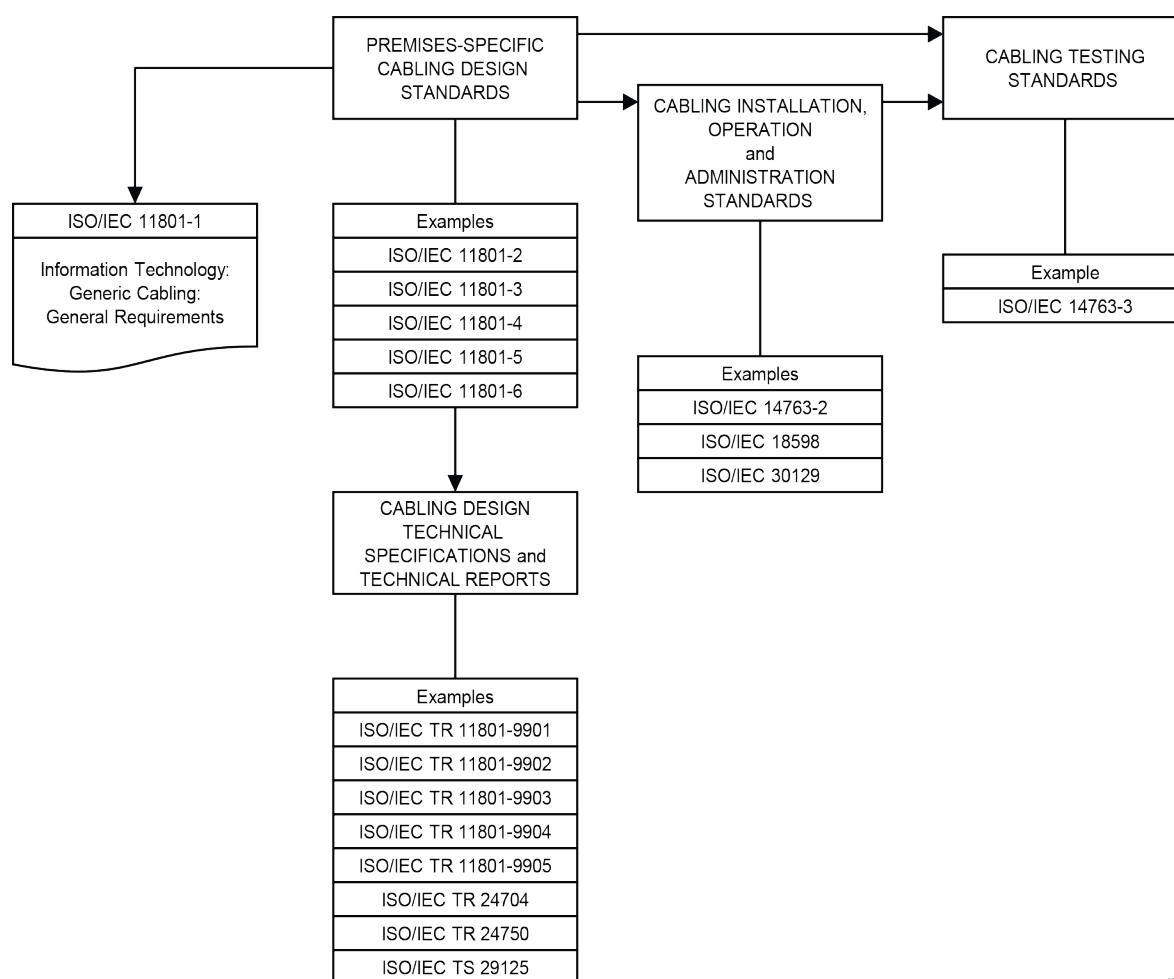

IEC

3.1 Terms and definitions

In 3.1.6, delete “SCP”

In 3.1.9, delete “SO”

Figure 11 – Example of a Type A generic cabling system with combined BD and SD

Replace the figure graphic with the following new figure graphic:

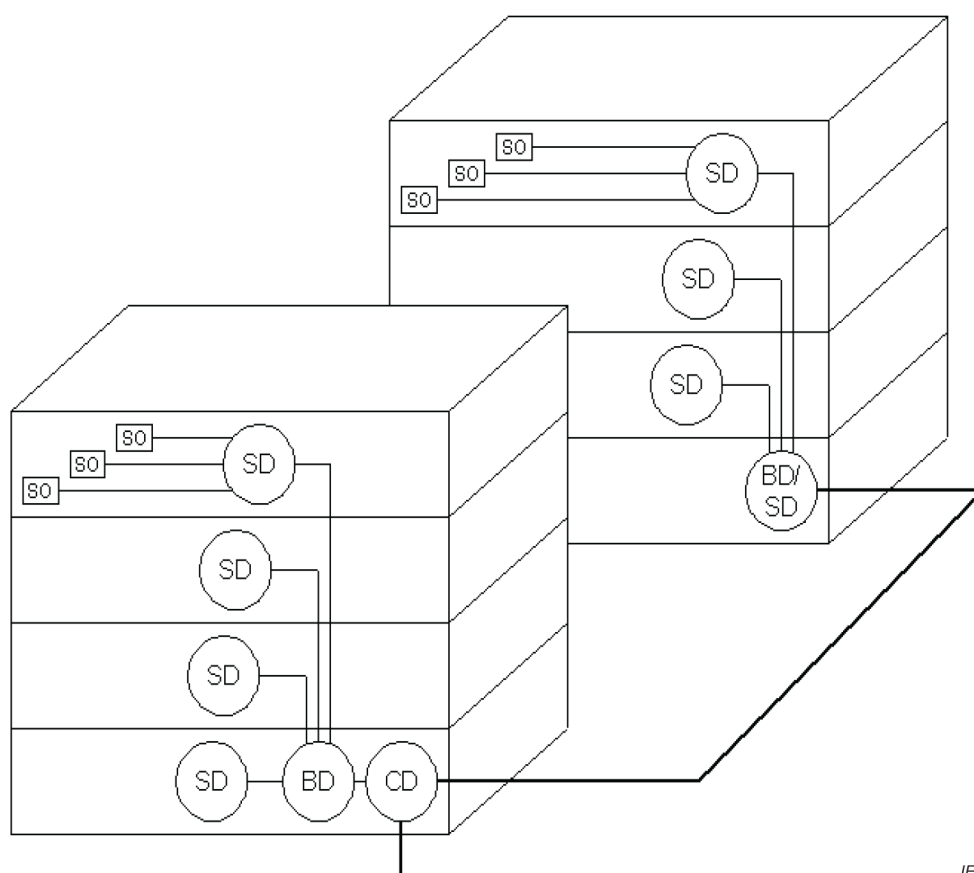


Table 3 – Service distribution channel length formulae in metres

In the first header row, replace “equations” with “formulae”.

Delete, in the first text box, starting with the definition of Y , the following:

“For operating temperatures above 20 °C, l_z should be reduced by 0,2 % per °C for screened cables and 0,4 % per °C (20 °C to 40 °C) and 0,6 % per °C (40 °C to 60 °C) for unscreened cables”

Replace, in the second text box, in the first paragraph starting with “For operating temperatures”, l_c with l_s .

Replace list item 1) with the following new list item:

- 1) 0,2 % per °C for screened balanced cables up to 60 °C,

Figure C.1 – Combined optical fibre backbone and service distribution channels

Replace subfigure b) with the following new subfigure:

