
**Information technology — UPnP
Device Architecture —**

**Part 20-3:
Audio video device control protocol —
Level 4 — Media server device**

Technologies de l'information — Architecture de dispositif UPnP —

*Partie 20-3: Protocole de contrôle de dispositif audio-vidéo — Niveau
4 — Dispositif serveur de média*





COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

CONTENTS

1	Scope	1
2	Normative references	2
3	Terms, definitions, symbols and abbreviations	4
3.1	Provisioning terms	4
3.2	Symbols	5
4	Notations and Conventions	5
4.1	Notation	5
4.1.1	Data Types	5
4.1.2	Strings Embedded in Other Strings	6
4.1.3	Extended Backus-Naur Form	6
4.2	Derived Data Types	7
4.2.1	Summary	7
4.2.2	CSV Lists	7
4.3	Management of XML Namespaces in Standardized DCPs	8
4.3.1	Namespace Prefix Requirements	12
4.3.2	Namespace Names, Namespace Versioning and Schema Versioning	13
4.3.3	Namespace Usage Examples	15
4.4	Vendor-defined Extensions	15
4.4.1	Vendor-defined Action Names	15
4.4.2	Vendor-defined State Variable Names	15
4.4.3	Vendor-defined XML Elements and attributes	16
4.4.4	Vendor-defined Property Names	16
5	Device Definitions	16
5.1	Device Type	16
5.2	Device Model	16
5.2.1	Description of Device Requirements	17
5.2.2	Relationships Between Services	17
6	XML Device Description	17
7	Test	19
Annex A (informative) Theory of Operation		20
A.1	Device Discovery	20
A.2	Locating Desired Content	20
A.3	Preparing to Transfer the Content	20
A.4	Controlling the Transfer of the Content	21
A.5	Recording Content	21
Annex B (informative) Bibliography		22

List of Tables

Table 1 — EBNF Operators.....	7
Table 2 — CSV Examples	8
Table 3 — Namespace Definitions.....	9
Table 4 — Schema-related Information	11
Table 5 — Default Namespaces for the AV Specifications.....	13
Table 6 — Device Requirements	16

List of Figures

Figure 1 — MediaServer Functional Diagram.....	1
--	---

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see <http://www.iso.org/directives>).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of Standard, the meaning of the ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword – Supplementary information](#)

ISO/IEC 29341-20-3 was prepared by UPnP Forum and adopted, under the PAS procedure, by joint technical committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

The list of all currently available parts of ISO/IEC 29341 series, under the general title *Information technology — UPnP Device Architecture*, can be found on the [ISO web site](#).

Introduction

ISO and IEC draw attention to the fact that it is claimed that compliance with this document may involve the use of patents as indicated below.

ISO and IEC take no position concerning the evidence, validity and scope of these patent rights. The holders of these patent rights have assured ISO and IEC that they are willing to negotiate licenses under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of these patent rights are registered with ISO and IEC.

Intel Corporation has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Intel Corporation
Standards Licensing Department
5200 NE Elam Young Parkway
MS: JFS-98
USA – Hillsboro, Oregon 97124

Microsoft Corporation has informed IEC and ISO that it has patent applications or granted patents as listed below:

6101499 / US; 6687755 / US; 6910068 / US; 7130895 / US; 6725281 / US; 7089307 / US;
7069312 / US; 10/783 524 /US

Information may be obtained from:

Microsoft Corporation
One Microsoft Way
USA – Redmond WA 98052

Philips International B.V. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Philips International B.V. – IP&S
High Tech campus, building 44 3A21
NL – 5656 Eindhoven

NXP B.V. (NL) has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

NXP B.V. (NL)
High Tech campus 60
NL – 5656 AG Eindhoven

Matsushita Electric Industrial Co. Ltd. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Matsushita Electric Industrial Co. Ltd.
1-3-7 Shiromi, Chuoh-ku
JP – Osaka 540-6139

Hewlett Packard Company has informed IEC and ISO that it has patent applications or granted patents as listed below:

5 956 487 / US; 6 170 007 / US; 6 139 177 / US; 6 529 936 / US; 6 470 339 / US; 6 571 388 / US; 6 205 466 / US

Information may be obtained from:

Hewlett Packard Company
1501 Page Mill Road
USA – Palo Alto, CA 94304

Samsung Electronics Co. Ltd. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Digital Media Business, Samsung Electronics Co. Ltd.
416 Maetan-3 Dong, Yeongtang-Gu,
KR – Suwon City 443-742

Huawei Technologies Co., Ltd. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Huawei Technologies Co., Ltd.
Administration Building, Bantian Longgang District
Shenzhen – China 518129

Qualcomm Incorporated has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Qualcomm Incorporated
5775 Morehouse Drive
San Diego, CA – USA 92121

Telecom Italia S.p.A. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Telecom Italia S.p.A.
Via Reiss Romoli, 274
Turin - Italy 10148

Cisco Systems informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA – USA 95134

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Original UPnP Document

Reference may be made in this document to original UPnP documents. These references are retained in order to maintain consistency between the specifications as published by ISO/IEC and by UPnP Implementers Corporation and later by UPnP Forum. The following table indicates the original UPnP document titles and the corresponding part of ISO/IEC 29341:

UPnP Document Title	ISO/IEC 29341 Part
UPnP Device Architecture 1.0	ISO/IEC 29341-1:2008
UPnP Device Architecture Version 1.0	ISO/IEC 29341-1:2011
UPnP Device Architecture 1.1	ISO/IEC 29341-1-1:2011
UPnP Device Architecture 2.0	ISO/IEC 29341-1-2
UPnP Basic:1 Device	ISO/IEC 29341-2
UPnP AV Architecture:1	ISO/IEC 29341-3-1:2008
UPnP AV Architecture:1	ISO/IEC 29341-3-1:2011
UPnP AVTransport:1 Service	ISO/IEC 29341-3-10
UPnP ConnectionManager:1 Service	ISO/IEC 29341-3-11
UPnP ContentDirectory:1 Service	ISO/IEC 29341-3-12
UPnP RenderingControl:1 Service	ISO/IEC 29341-3-13
UPnP MediaRenderer:1 Device	ISO/IEC 29341-3-2
UPnP MediaRenderer:2 Device	ISO/IEC 29341-3-2:2011
UPnP MediaServer:1 Device	ISO/IEC 29341-3-3
UPnP AVTransport:2 Service	ISO/IEC 29341-4-10:2008
UPnP AVTransport:2 Service	ISO/IEC 29341-4-10:2011
UPnP ConnectionManager:2 Service	ISO/IEC 29341-4-11:2008
UPnP ConnectionManager:2 Service	ISO/IEC 29341-4-11:2011
UPnP ContentDirectory:2 Service	ISO/IEC 29341-4-12
UPnP RenderingControl:2 Service	ISO/IEC 29341-4-13:2008
UPnP RenderingControl:2 Service	ISO/IEC 29341-4-13:2011
UPnP ScheduledRecording:1	ISO/IEC 29341-4-14
UPnP ScheduledRecording:2	ISO/IEC 29341-4-14:2011
UPnP MediaRenderer:2 Device	ISO/IEC 29341-4-2
UPnP MediaServer:2 Device	ISO/IEC 29341-4-3
UPnP AV Datastructure Template:1	ISO/IEC 29341-4-4:2008
UPnP AV Datastructure Template:1	ISO/IEC 29341-4-4:2011
UPnP DigitalSecurityCamera:1 Device	ISO/IEC 29341-5-1
UPnP DigitalSecurityCameraMotionImage:1 Service	ISO/IEC 29341-5-10
UPnP DigitalSecurityCameraSettings:1 Service	ISO/IEC 29341-5-11
UPnP DigitalSecurityCameraStillImage:1 Service	ISO/IEC 29341-5-12
UPnP HVAC_System:1 Device	ISO/IEC 29341-6-1
UPnP ControlValve:1 Service	ISO/IEC 29341-6-10
UPnP HVAC_FanOperatingMode:1 Service	ISO/IEC 29341-6-11
UPnP FanSpeed:1 Service	ISO/IEC 29341-6-12
UPnP HouseStatus:1 Service	ISO/IEC 29341-6-13
UPnP HVAC_SetpointSchedule:1 Service	ISO/IEC 29341-6-14
UPnP TemperatureSensor:1 Service	ISO/IEC 29341-6-15
UPnP TemperatureSetpoint:1 Service	ISO/IEC 29341-6-16
UPnP HVAC_UserOperatingMode:1 Service	ISO/IEC 29341-6-17
UPnP HVAC_ZoneThermostat:1 Device	ISO/IEC 29341-6-2

UPnP BinaryLight:1 Device	ISO/IEC 29341-7-1
UPnP Dimming:1 Service	ISO/IEC 29341-7-10
UPnP SwitchPower:1 Service	ISO/IEC 29341-7-11
UPnP DimmableLight:1 Device	ISO/IEC 29341-7-2
UPnP InternetGatewayDevice:1 Device	ISO/IEC 29341-8-1
UPnP LANHostConfigManagement:1 Service	ISO/IEC 29341-8-10
UPnP Layer3Forwarding:1 Service	ISO/IEC 29341-8-11
UPnP LinkAuthentication:1 Service	ISO/IEC 29341-8-12
UPnP RadiusClient:1 Service	ISO/IEC 29341-8-13
UPnP WANCableLinkConfig:1 Service	ISO/IEC 29341-8-14
UPnP WANCommonInterfaceConfig:1 Service	ISO/IEC 29341-8-15
UPnP WANDSLLinkConfig:1 Service	ISO/IEC 29341-8-16
UPnP WANEthernetLinkConfig:1 Service	ISO/IEC 29341-8-17
UPnP WANIPConnection:1 Service	ISO/IEC 29341-8-18
UPnP WANPOTSLinkConfig:1 Service	ISO/IEC 29341-8-19
UPnP LANDevice:1 Device	ISO/IEC 29341-8-2
UPnP WANPPPConnection:1 Service	ISO/IEC 29341-8-20
UPnP WLANConfiguration:1 Service	ISO/IEC 29341-8-21
UPnP WANDevice:1 Device	ISO/IEC 29341-8-3
UPnP WANConnectionDevice:1 Device	ISO/IEC 29341-8-4
UPnP WLANAccessPointDevice:1 Device	ISO/IEC 29341-8-5
UPnP Printer:1 Device	ISO/IEC 29341-9-1
UPnP ExternalActivity:1 Service	ISO/IEC 29341-9-10
UPnP Feeder:1.0 Service	ISO/IEC 29341-9-11
UPnP PrintBasic:1 Service	ISO/IEC 29341-9-12
UPnP Scan:1 Service	ISO/IEC 29341-9-13
UPnP Scanner:1.0 Device	ISO/IEC 29341-9-2
UPnP QoS Architecture:1.0	ISO/IEC 29341-10-1
UPnP QosDevice:1 Service	ISO/IEC 29341-10-10
UPnP QosManager:1 Service	ISO/IEC 29341-10-11
UPnP QosPolicyHolder:1 Service	ISO/IEC 29341-10-12
UPnP QoS Architecture:2	ISO/IEC 29341-11-1
UPnP QosDevice:2 Service	ISO/IEC 29341-11-10
UPnP QosManager:2 Service	ISO/IEC 29341-11-11
UPnP QosPolicyHolder:2 Service	ISO/IEC 29341-11-12
UPnP QOS v2 Schema Files	ISO/IEC 29341-11-2
UPnP RemoteUIClientDevice:1 Device	ISO/IEC 29341-12-1
UPnP RemoteUIClient:1 Service	ISO/IEC 29341-12-10
UPnP RemoteUIServer:1 Service	ISO/IEC 29341-12-11
UPnP RemoteUIServerDevice:1 Device	ISO/IEC 29341-12-2
UPnP DeviceSecurity:1 Service	ISO/IEC 29341-13-10
UPnP SecurityConsole:1 Service	ISO/IEC 29341-13-11
UPnP ContentDirectory:3 Service	ISO/IEC 29341-14-12:2011
UPnP MediaServer:3 Device	ISO/IEC 29341-14-3:2011
UPnP ContentSync:1	ISO/IEC 29341-15-10:2011
UPnP Low Power Architecture:1	ISO/IEC 29341-16-1:2011
UPnP LowPowerProxy:1 Service	ISO/IEC 29341-16-10:2011

ISO/IEC 29341-20-3:2017(E)

UPnP LowPowerDevice:1 Service	ISO/IEC 29341-16-11:2011
UPnP QoS Architecture:3	ISO/IEC 29341-17-1:2011
UPnP QoSDevice:3 Service	ISO/IEC 29341-17-10:2011
UPnP QoSManager:3 Service	ISO/IEC 29341-17-11:2011
UPnP QoSPolicyHolder:3 Service	ISO/IEC 29341-17-12:2011
UPnP QoSDevice:3 Addendum	ISO/IEC 29341-17-13:2011
UPnP RemoteAccessArchitecture:1	ISO/IEC 29341-18-1:2011
UPnP InboundConnectionConfig:1 Service	ISO/IEC 29341-18-10:2011
UPnP RADAConfig:1 Service	ISO/IEC 29341-18-11:2011
UPnP RADASync:1 Service	ISO/IEC 29341-18-12:2011
UPnP RATAConfig:1 Service	ISO/IEC 29341-18-13:2011
UPnP RAClient:1 Device	ISO/IEC 29341-18-2:2011
UPnP RAServer:1 Device	ISO/IEC 29341-18-3:2011
UPnP RADiscoveryAgent:1 Device	ISO/IEC 29341-18-4:2011
UPnP SolarProtectionBlind:1 Device	ISO/IEC 29341-19-1:2011
UPnP TwoWayMotionMotor:1 Service	ISO/IEC 29341-19-10:2011
UPnP AV Architecture:2	ISO/IEC 29341-20-1
UPnP AVTransport:3 Service	ISO/IEC 29341-20-10
UPnP ConnectionManager:3 Service	ISO/IEC 29341-20-11
UPnP ContentDirectory:4 Device	ISO/IEC 29341-20-12
UPnP RenderingControl:3 Service	ISO/IEC 29341-20-13
UPnP ScheduledRecording:2 Service	ISO/IEC 29341-20-14
UPnP MediaRenderer:3 Service	ISO/IEC 29341-20-2
UPnP MediaServer:4 Device	ISO/IEC 29341-20-3
UPnP AV Datastructure Template:1	ISO/IEC 29341-20-4
UPnP InternetGatewayDevice:2 Device	ISO/IEC 29341-24-1
UPnP WANIPConnection:2 Service	ISO/IEC 29341-24-10
UPnP WANIPv6FirewallControl:1 Service	ISO/IEC 29341-24-11
UPnP WANConnectionDevice:2 Service	ISO/IEC 29341-24-2
UPnP WANDevice:2 Device	ISO/IEC 29341-24-3
UPnP Telephony Architecture:2	ISO/IEC 29341-26-1
UPnP CallManagement:2 Service	ISO/IEC 29341-26-10
UPnP MediaManagement:2 Service	ISO/IEC 29341-26-11
UPnP Messaging:2 Service	ISO/IEC 29341-26-12
UPnP PhoneManagement:2 Service	ISO/IEC 29341-26-13
UPnP AddressBook:1 Service	ISO/IEC 29341-26-14
UPnP Calendar:1 Service	ISO/IEC 29341-26-15
UPnP Presense:1 Service	ISO/IEC 29341-26-16
UPnP TelephonyClient:2 Device	ISO/IEC 29341-26-2
UPnP TelephonyServer:2 Device	ISO/IEC 29341-26-3
UPnP Friendly Info Update:1 Service	ISO/IEC 29341-27-1
UPnP MultiScreen MultiScreen Architecture:1	ISO/IEC 29341-28-1
UPnP MultiScreen Application Management:1 Service	ISO/IEC 29341-28-10
UPnP MultiScreen Screen:1 Device	ISO/IEC 29341-28-2
UPnP MultiScreen Application Management:2 Service	ISO/IEC 29341-29-10
UPnP MultiScreen Screen:2 Device	ISO/IEC 29341-29-2
UPnP IoT Management and Control Architecture Overview:1	ISO/IEC 29341-30-1

UPnP DataStore:1 Service	ISO/IEC 29341-30-10
UPnP IoT Management and Control Data Model:1 Service	ISO/IEC 29341-30-11
UPnP IoT Management and Control Transport Generic:1 Service	ISO/IEC 29341-30-12
UPnP IoT Management and Control:1 Device	ISO/IEC 29341-30-2
UPnP Energy Management:1 Service	ISO/IEC 29341-31-1

1 Scope

This device specification is compliant with the UPnP Device Architecture version 1.0 [14]. It defines a device type referred to herein as MediaServer.

The MediaServer specification defines a general-purpose device that can be used to instantiate any Consumer Electronics (CE) device that provides AV content (for example, media) to other UPnP devices on the home network. It is based on the UPnP AV Architecture Framework (described in another document). It exposes its content via the ContentDirectory service (refer to the ContentDirectory service specification for details). The MediaServer may also provide functionality to record content using the ScheduledRecording service (refer to the ScheduledRecording service specification). As such, the MediaServer can handle any specific type of media, any data format, and transfer protocol.

Example instances of a MediaServer include traditional devices such as VCRs, CD Players, DVD Players, audio-tape players, still-image cameras, camcorders, radios, TV Tuners, and set-top boxes. Additional examples of a MediaServer also include new digital devices such as MP3 servers, PVRs, smartphones and Home MediaServers such as the PC. Although these devices contain diverse (AV) content in one form or another, the MediaServer (via the ContentDirectory service) is able to expose this content to the home network in a uniform and consistent manner. This ability allows the MediaServer to instantiate traditional single-function devices as well as more recent multi-function devices such as VCR-DVD players and the general purpose Home MediaServer, which contains a wide variety of content such as MPEG2 video, CD audio, MP3 and/or WMA audio, JPEG images, etc.

The MediaServer specification is very lightweight and can easily be implemented on low-resource devices such as still-image cameras or MP3 players that want to expose their local content to the home network. The MediaServer can also be used for high-end Home MediaServers that contain dozens of Gigabytes of heterogeneous content. Refer to the Theory Of Operation subclause for some specific examples of the MediaServer.

A full-featured MediaServer device provides clients with the following capabilities:

- Enumerate and query any of the content that the MediaServer can provide to the home network.
- Negotiate a common transfer protocol and data format between the MediaServer and target device.
- Control the flow of the content (for example, FF, REW, etc).
- Copy (import) content to the MediaServer from another device.
- Record content using the ScheduledRecording service [25].

This device specification does not provide:

- The ability to render AV content.

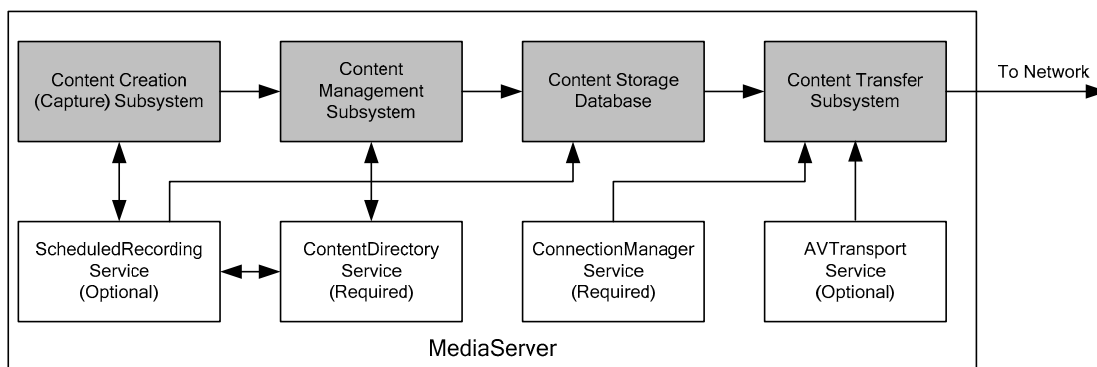


Figure 1 — MediaServer Functional Diagram

The un-shaded blocks represent the UPnP services that are contained by a MediaServer device. The shaded blocks represent various device-specific modules that the UPnP services

© ISO/IEC 2017 – All rights reserved

might interact with. However, the internal architecture of a MediaServer device is vendor specific.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[1] – *XML Schema for RenderingControl AllowedTransformSettings*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/AllowedTransformSettings-v1-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/AllowedTransformSettings.xsd>.

[2] – *AV Datastructure Template:1*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/specs/av/UPnP-av-AVDataStructureTemplate-v1-20130331.pdf>.

Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-AVDataStructureTemplate-v1.pdf>.

[3] – *XML Schema for UPnP AV Common XML Data Types*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/av-v3-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/av.xsd>.

[4] – *XML Schema for UPnP AV Common XML Structures*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/avs-v3-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/avs.xsd>.

[5] – *AVTransport:3*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/specs/av/UPnP-av-AVTransport-v3-Service-20130331.pdf>.

Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-AVTransport-v3-Service.pdf>.

[6] – *XML Schema for AVTransport LastChange Eventing*, UPnP Forum, September 30, 2008.

Available at: <http://www.upnp.org/schemas/av/avt-event-v2-20080930.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/avt-event.xsd>.

[7] – *ContentDirectory:4*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/specs/av/UPnP-av-ContentDirectory-v4-Service-20130331.pdf>.

Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-ContentDirectory-v4-Service.pdf>.

[8] – *XML Schema for ContentDirectory LastChange Eventing*, UPnP Forum, September 30, 2008.

Available at: <http://www.upnp.org/schemas/av/cds-event-v1-20080930.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/cds-event.xsd>.

[9] – *ConnectionManager:3*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/specs/av/UPnP-av-ConnectionManager-v3-Service-20130331.pdf>.

Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-ConnectionManager-v3-Service.pdf>.

[10] – *XML Schema for ConnectionManager DeviceClockInfoUpdates*, UPnP Forum, December 31, 2010.

Available at: <http://www.upnp.org/schemas/av/cm-deviceClockInfoUpdates-v1-20101231.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/cm-deviceClockInfoUpdates.xsd>.

[11] – *XML Schema for ConnectionManager Features*, UPnP Forum, December 31, 2010.

Available at: <http://www.upnp.org/schemas/av/cm-featureList-v1-20101231.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/cm-featureList.xsd>.

- [12] – *XML Schema for UPnP AV Dublin Core*.
Available at: <http://www.dublincore.org/schemas/xmls/simpledc20020312.xsd>.
- [13] – *DCMI term declarations represented in XML schema language*.
Available at: <http://www.dublincore.org/schemas/xmls>.
- [14] – *UPnP Device Architecture, version 1.0*, UPnP Forum, October 15, 2008.
Available at: <http://www.upnp.org/specs/arch/UPnP-arch-DeviceArchitecture-v1.0-20081015.pdf>.
Latest version available at: <http://www.upnp.org/specs/arch/UPnP-arch-DeviceArchitecture-v1.0.pdf>.
- [15] – *XML Schema for ContentDirectory Structure and Metadata (DIDL-Lite)*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/schemas/av/didl-lite-v3-20130331.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/didl-lite.xsd>.
- [16] – *XML Schema for ContentDirectory DeviceMode*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/dmo-v1-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/dmo.xsd>.
- [17] – *XML Schema for ContentDirectory DeviceModeRequest*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/dmor-v1-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/dmor.xsd>.
- [18] – *XML Schema for ContentDirectory DeviceModeStatus*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/dmos-v1-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/dmos.xsd>.
- [19] – ISO/IEC 14977, *Information technology - Syntactic metalanguage - Extended BNF*, December 1996.
- [20] – *XML Schema for ContentDirectory PermissionsInfo*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/pi-v1-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/pi.xsd>.
- [21] – *RenderingControl:3*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/specs/av/UPnP-av-RenderingControl-v3-Service-20130331.pdf>.
Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-RenderingControl-v3-Service.pdf>.
- [22] – *XML Schema for RenderingControl LastChange Eventing*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/rcs-event-v3-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/rcs-event.xsd>.
- [23] – *XML Schema for ConnectionManager RendererInfo*, UPnP Forum, December 31, 2010.
Available at: <http://www.upnp.org/schemas/av/rri-v1-20101231.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/rri.xsd>.
- [24] – *XML Schema for AVTransport PlaylistInfo*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/schemas/av/rpl-v1-20130331.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/rpl.xsd>.
- [25] – *ScheduledRecording:2*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/specs/av/UPnP-av-ScheduledRecording-v2-Service-20130331.pdf>.
Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-ScheduledRecording-v2-Service.pdf>.

[26] – *XML Schema for ScheduledRecording Metadata and Structure*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/srs-v2-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/srs.xsd>.

[27] – *XML Schema for ScheduledRecording LastChange Eventing*, UPnP Forum, September 30, 2008.

Available at: <http://www.upnp.org/schemas/av/srs-event-v1-20080930.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/srs-event.xsd>.

[28] – *XML Schema for RenderingControl TransformSettings*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/TransformSettings-v1-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/TransformSettings.xsd>.

[29] – *XML Schema for ContentDirectory Metadata*, UPnP Forum, March 31, 2013.

Available at: <http://www.upnp.org/schemas/av/upnp-v4-20130331.xsd>.

Latest version available at: <http://www.upnp.org/schemas/av/upnp.xsd>.

[30] – *The “xml:” Namespace*, November 3, 2004.

Available at: <http://www.w3.org/XML/1998/namespace>.

[31] – *XML Schema for the “xml:” Namespace*.

Available at: <http://www.w3.org/2001/xml.xsd>.

[32] – *Namespaces in XML*, Tim Bray, Dave Hollander, Andrew Layman, eds., W3C Recommendation, January 14, 1999.

Available at: <http://www.w3.org/TR/1999/REC-xml-names-19990114>.

[33] – *XML Schema Part 1: Structures, Second Edition*, Henry S. Thompson, David Beech, Murray Maloney, Noah Mendelsohn, W3C Recommendation, 28 October 2004.

Available at: <http://www.w3.org/TR/2004/REC-xmlschema-1-20041028>.

[34] – *XML Schema Part 2: Data Types, Second Edition*, Paul V. Biron, Ashok Malhotra, W3C Recommendation, 28 October 2004.

Available at: <http://www.w3.org/TR/2004/REC-xmlschema-2-20041028>.

[35] – *XML Schema for XML Schema*.

Available at: <http://www.w3.org/2001/XMLSchema.xsd>.

[36] – *DeviceProtection:1*, UPnP Forum, February 24, 2011.

Available at: <http://www.upnp.org/specs/gw/UPnP-gw-DeviceProtection-v1-Service-20110224.pdf>.

Latest version available at: <http://www.upnp.org/specs/gw/UPnP-gw-DeviceProtection-v1-Service.pdf>.

3 Terms, definitions, symbols and abbreviations

For the purposes of this document, the terms and definitions given in [14] and the following subclauses 3.1 and 3.2 apply.

3.1 Provisioning terms

3.1.1

allowed

A

The definition or behavior is allowed.

3.1.2

conditionally allowed

CA

The definition or behavior depends on a condition. If the specified condition is met, then the definition or behavior is allowed, otherwise it is not allowed.

3.1.3 conditionally required

CR

The definition or behavior depends on a condition. If the specified condition is met, then the definition or behavior is required. Otherwise the definition or behavior is allowed as default unless specifically defined as not allowed.

3.1.4 required

R

The definition or behavior is required.

3.1.5 R/A

Used in a table column heading to indicate that each abbreviated entry in the column declares the provisioning status of the item named in the entry's row.

3.1.6 **X**

Vendor-defined, non-standard.

3.1.7 **-D**

Declares that the item referred to is deprecated, when it is appended to any of the other abbreviated provisioning terms.

3.1.8 CSV list (or CSV)

Comma separated value list. List—or one-dimensional array—of values contained in a string and separated by commas

3.2 Symbols

3.2.1 ::

Signifies a hierarchical parent-child (parent::child) relationship between the two objects separated by the double colon. This delimiter is used in multiple contexts, for example: Service::Action(), Action():Argument, parentProperty::childProperty.

4 Notations and Conventions

4.1 Notation

- UPnP interface names defined in the UPnP Device Architecture specification [14] are styled in **green bold underlined** text.
- UPnP interface names defined outside of the UPnP Device Architecture specification [14] are styled in **red italic underlined** text.
- Some additional non-interface names and terms are styled in *italic* text.
- Words that are emphasized are also styled in *italic* text. The difference between italic terms and italics for emphasis will be apparent by context.
- Strings that are to be taken literally are enclosed in “double quotes”.

4.1.1 Data Types

Data type definitions come from three sources:

- All state variable and action argument data types are defined in [14].
- Basic data types for properties are defined in [34].
- Additional data types for properties are defined in the XML schema(s) (see [3]) associated with this service.

For UPnP Device Architecture defined **boolean** data types, it is strongly recommended to use the value "0" for false, and the value "1" for true. However, when used as input arguments, the values "**false**", "**no**", "**true**", "**yes**" may also be encountered and shall be accepted. Nevertheless, it is strongly recommended that all **boolean** state variables and output arguments be represented as "0" and "1".

For XML Schema defined Boolean data types, it is strongly recommended to use the value "0" for false, and the value "1" for true. However, when used as input properties, the values "**false**", "**true**" may also be encountered and shall be accepted. Nevertheless, it is strongly recommended that all Boolean properties be represented as "0" and "1".

4.1.2 Strings Embedded in Other Strings

Some string variables and arguments described in this document contain substrings that shall be independently identifiable and extractable for other processing. This requires the definition of appropriate substring delimiters and an escaping mechanism so that these delimiters can also appear as ordinary characters in the string and/or its independent substrings. This document uses embedded strings in two contexts – Comma Separated Value (CSV) lists (see subclause 4.2.2) and property values in search criteria strings. Escaping conventions use the backslash character, "\" (character code U+005C), as follows:

- a) Backslash ("\") is represented as "\\" in both contexts.
- b) Comma (",") is
 - 1) represented as "\", in individual substring entries in CSV lists
 - 2) not escaped in search strings
- c) Double quote ("") is
 - 1) not escaped in CSV lists
 - 2) not escaped in search strings when it appears as the start or end delimiter of a property value
 - 3) represented as "\"" in search strings when it appears as a character that is part of the property value

4.1.3 Extended Backus-Naur Form

Extended Backus-Naur Form is used in this document for a formal syntax description of certain constructs. The usage here is according to the reference [19].

4.1.3.1 Typographic conventions for EBNF

Non-terminal symbols are unquoted sequences of characters from the set of English upper and lower case letters, the digits "0" through "9", and the hyphen ("-"). Character sequences between 'single quotes' are terminal strings and shall appear literally in valid strings. Character sequences between (*comment delimiters*) are English language definitions or supplementary explanations of their associated symbols. White space in the EBNF is used to separate elements of the EBNF, not to represent white space in valid strings. White space usage in valid strings is described explicitly in the EBNF. Finally, the EBNF uses the following operators in Table 1:

Table 1 — EBNF Operators

Operator	Semantics
<code>::=</code>	definition – the non-terminal symbol on the left is defined by one or more alternative sequences of terminals and/or non-terminals to its right.
<code> </code>	alternative separator – separates sequences on the right that are independently allowed definitions for the non-terminal on the left.
<code>*</code>	null repetition – means the expression to its left may occur zero or more times.
<code>+</code>	non-null repetition – means the expression to its left shall occur at least once and may occur more times.
<code>[]</code>	optional – the expression between the brackets is allowed.
<code>()</code>	grouping – groups the expressions between the parentheses.
<code>-</code>	character range – represents all characters between the left and right character operands inclusively.

4.2 Derived Data Types

4.2.1 Summary

Subclause 4.2 defines a derived data type that is represented as a string data type with special syntax. This specification uses string data type definitions that originate from two different sources. The UPnP Device Architecture defined **string** data type is used to define state variable and action argument **string** data types. The XML Schema namespace is used to define property xsd:string data types. The following definition in subclause 4.2.2 applies to both string data types.

4.2.2 CSV Lists

The UPnP AV services use state variables, action arguments and properties that represent lists – or one-dimensional arrays – of values. The UPnP Device Architecture, Version 1.0 [14], does not provide for either an array type or a list type, so a list type is defined here. Lists may either be homogeneous (all values are the same type) or heterogeneous (all values can be of different types). Lists may also consist of repeated occurrences of homogeneous or heterogeneous subsequences, all of which have the same syntax and semantics (same number of values, same value types and in the same order). The data type of a homogeneous list is **string** or xsd:string and denoted by CSV (x), where x is the type of the individual values. The data type of a heterogeneous list is also **string** or xsd:string and denoted by CSV (x, y, z), where x, y and z are the types of the individual values. If the number of values in the heterogeneous list is too large to show each type individually, that variable type is represented as CSV (heterogeneous), and the variable description includes additional information as to the expected sequence of values appearing in the list and their corresponding types. The data type of a repeated subsequence list is **string** or xsd:string and denoted by CSV ({a,b,c},{x, y, z}), where a, b, c, x, y and z are the types of the individual values in the subsequence and the subsequences may be repeated zero or more times.

- A list is represented as a **string** type (for state variables and action arguments) or xsd:string type (for properties).
- Commas separate values within a list.
- Integer values are represented in CSVs with the same syntax as the integer data type specified in [14] (that is: allowed leading sign, allowed leading zeroes, numeric US-ASCII)
- Boolean values are represented in state variable and action argument CSVs as either “**0**” for false or “**1**” for true. These values are a subset of the defined **boolean** data type values specified in [14]: **0, false, no, 1, true, yes**.
- Boolean values are represented in property CSVs as either “**0**” for false or “**1**” for true. These values are a subset of the defined Boolean data type values specified in [34]: 0, false, 1, true.
- Escaping conventions for the comma and backslash characters are defined in 4.1.2.

- White space before, after, or interior to any numeric data type is not allowed.
- White space before, after, or interior to any other data type is part of the value.

Table 2 — CSV Examples

Type refinement of string	Value	Comments
CSV (string) or CSV (xsd:string)	"+artist,-date"	List of 2 property sort criteria.
CSV (int) or CSV (xsd:integer)	"1,-5,006,0,+7"	List of 5 integers.
CSV (boolean) or CSV (xsd:Boolean)	"0,1,1,0"	List of 4 booleans
CSV (string) or CSV (xsd:string)	"Smith\, Fred,Jones\, Davey"	List of 2 names, "Smith, Fred" and "Jones, Davey"
CSV (i4 , string , ui2) or CSV (xsd:int, xsd:string, xsd:unsignedShort)	"-29837, string with leading blanks,0"	Note that the second value is " string with leading blanks"
CSV (i4) or CSV (xsd:int)	"3, 4"	Illegal CSV. White space is not allowed as part of an integer value.
CSV (string) or CSV (xsd:string)	" , ,"	List of 3 empty string values
CSV (heterogeneous)	"Alice,Marketing,5,Sue,R&D,21,Dave,Finance,7"	List of unspecified number of people and associated attributes. Each person is described by 3 elements: a name string , a department string and years-of-service ui2 or a name xsd:string, a department xsd:string and years-of-service xsd:unsignedShort.

4.3 Management of XML Namespaces in Standardized DCPs

UPnP specifications make extensive use of XML namespaces. This enables separate DCPs, and even separate components of an individual DCP, to be designed independently and still avoid name collisions when they share XML documents. Every name in an XML document belongs to exactly one namespace. In documents, XML names appear in one of two forms: qualified or unqualified. An unqualified name (or no-colon-name) contains no colon (":") characters. An unqualified name belongs to the document's default namespace. A qualified name is two no-colon-names separated by one colon character. The no-colon-name before the colon is the qualified name's namespace prefix, the no-colon-name after the colon is the qualified name's "local" name (meaning local to the namespace identified by the namespace prefix). Similarly, the unqualified name is a local name in the default namespace.

The formal name of a namespace is a URI. The namespace prefix used in an XML document is *not* the name of the namespace. The namespace name shall be globally unique. It has a single definition that is accessible to anyone who uses the namespace. It has the same meaning anywhere that it is used, both inside and outside XML documents. The namespace prefix, however, in formal XML usage, is defined only in an XML document. It shall be locally unique to the document. Any valid XML no-colon-name may be used. And, in formal XML usage, different XML documents may use different namespace prefixes to refer to the same namespace. The creation and use of the namespace prefix was standardized by the W3C XML Committee in [32] strictly as a convenient local shorthand replacement for the full URI name of a namespace in individual documents.

All AV object properties are represented in XML by element and attribute names, therefore, all property names belong to an XML namespace.

For the same reason that namespace prefixes are convenient in XML documents, it is convenient in specification text to refer to namespaces using a namespace prefix. Therefore, this specification declares a “standard” prefix for all XML namespaces used herein. In addition, this specification expands the scope where these prefixes have meaning, beyond a single XML document, to all of its text, XML examples, and certain string-valued properties. This expansion of scope *does not* supersede XML rules for usage in documents, it only augments and complements them in important contexts that are out-of-scope for the XML specifications. For example, action arguments which refer to CDS properties, such as the [SearchCriteria](#) argument of the [Search\(\)](#) action or the [Filter](#) argument of the [Browse\(\)](#) action, shall use the predefined namespace prefixes when referring to CDS properties (“upnp:”, “dc:”, etc).

All of the namespaces used in this specification are listed in Table 3 and Table 4. For each such namespace, Table 3 gives a brief description of it, its name (a URI) and its defined “standard” prefix name. Some namespaces included in these tables are not directly used or referenced in this document. They are included for completeness to accommodate those situations where this specification is used in conjunction with other UPnP specifications to construct a complete system of devices and services. For example, since the ScheduledRecording service depends on and refers to the ContentDirectory service, the predefined “srs:” namespace prefix is included. The individual specifications in such collections all use the same standard prefix. The standard prefixes are also used in Table 4 to cross-reference additional namespace information. Table 4 includes each namespace’s valid XML document root element(s) (if any), its schema file name, versioning information (to be discussed in more detail below), and a link to the entry in Clause 2 for its associated schema.

The normative definitions for these namespaces are the documents referenced in Table 3. The schemas are designed to support these definitions for both human understanding and as test tools. However, limitations of the XML Schema language itself make it difficult for the UPnP-defined schemas to accurately represent all details of the namespace definitions. As a result, the schemas will validate many XML documents that are not valid according to the specifications.

The Working Committee expects to continue refining these schemas after specification release to reduce the number of documents that are validated by the schemas while violating the specifications, but the schemas will still be informative, supporting documents. Some schemas might become normative in future versions of the specifications.

Table 3 — Namespace Definitions

Standard Name-space Prefix	Namespace Name	Namespace Description	Normative Definition Document Reference
<i>AV Working Committee defined namespaces</i>			
atrs	urn:schemas-upnp-org:av:AllowedTransformSettings	AllowedTransformSettings and AllowedDefaultTransformSettings state variables for RenderingControl	[21]
av	urn:schemas-upnp-org:av:av	Common data types for use in AV schemas	[3]
avdt	urn:schemas-upnp-org:av:avdt	Datastructure Template	[2]
avs	urn:schemas-upnp-org:av:avs	Common structures for use in AV schemas	[4]
avt-event	urn:schemas-upnp-org:metadata-1-0/AVT/	Evented LastChange state variable for AVTransport	[5]
cds-event	urn:schemas-upnp-org:av:cds-event	Evented LastChange state variable for ContentDirectory	[7]
cm-dciu	urn:schemas-upnp-org:av:cm-deviceClockInfoUpdates	Evented DeviceClockInfoUpdates state variable for ConnectionManager	[9]
cm-ftrlist	urn:schemas-upnp-org:av:cm-featureList	FeatureList state variable for ConnectionManager	[9]

Standard Name-space Prefix	Namespace Name	Namespace Description	Normative Definition Document Reference
didl-lite	urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/	Structure and metadata for ContentDirectory	[7]
dmo	urn:schemas-upnp-org:av:dmo	Evented <u>DeviceMode</u> state variable for ContentDirectory	[7]
dmor	urn:schemas-upnp-org:av:dmor	<u>A_ARG_TYPE_DeviceModeRequest</u> state variable for ContentDirectory	[7]
dmos	urn:schemas-upnp-org:av:dmos	<u>DeviceModeStatus</u> state variable for ContentDirectory	[7]
pi	urn:schemas-upnp-org:av:pi	<u>PermissionsInfo</u> state variable for ContentDirectory	[7]
rds-event	urn:schemas-upnp-org:metadata-1-0/RCS/	Evented <u>LastChange</u> state variable for RenderingControl	[21]
rii	urn:schemas-upnp-org:av:rii	<u>A_ARG_TYPE_RenderingInfoList</u> state variable for ConnectionManager	[9]
rpl	urn:schemas-upnp-org:av:rpl	<u>A_ARG_TYPE_PlaylistInfo</u> state variable for AVTransport	[5]
srs	urn:schemas-upnp-org:av:srs	Metadata and structure for ScheduledRecording	[25]
srs-event	urn:schemas-upnp-org:av:srs-event	Evented <u>LastChange</u> state variable for ScheduledRecording	[25]
trs	urn:schemas-upnp-org:av:TransformSettings	<u>TransformSettings</u> and <u>DefaultTransformSettings</u> state variables for RenderingControl	[21]
upnp	urn:schemas-upnp-org:metadata-1-0/upnp/	Metadata for ContentDirectory	[7]
<i>Externally defined namespaces</i>			
dc	http://purl.org/dc/elements/1.1/	Dublin Core	[13]
xsd	http://www.w3.org/2001/XMLSchema	XML Schema Language 1.0	[33], [34]
xsi	http://www.w3.org/2001/XMLSchema-instance	XML Schema Instance Document schema	[33] 2.6 & 3.2.7
xml	http://www.w3.org/XML/1998/namespace	The "xml:" Namespace	[30]

Table 4 — Schema-related Information

Standard Name-space Prefix	Relative URI and File Name ^a • Form 1, Form 2, Form3	Valid Root Element(s)	Schema Reference
<i>AV Working Committee Defined Namespaces</i>			
atrs	AllowedTransformSetting s-vn-yyyymmdd.xsd AllowedTransformSetting s-vn.xsd AllowedTransformSetting s.xsd	<TransformList>	[1]
av	av-vn-yyyymmdd.xsd av-vn.xsd av.xsd	n/a	[3]
avdt	avdt-vn-yyyymmdd.xsd avdt-vn.xsd avdt.xsd	<AVDT>	[2]
avs	avs-vn-yyyymmdd.xsd avs-vn.xsd avs.xsd	<Capabilities> <Features> <stateVariableValuePairs>	[4]
avt-event	avt-event-vn- yyyymmdd.xsd avt-event-vn.xsd avt-event.xsd	<Event>	[6]
cds-event	cds-event-vn- yyyymmdd.xsd cds-event-vn.xsd cds-event.xsd	<StateEvent>	[8]
cm-dciu	cm- deviceClockInfoUpdates- vn-yyyymmdd.xsd cm- deviceClockInfoUpdates -vn.xsd cm- deviceClockInfoUpdates. xsd	<DeviceClockInfoUpdates>	[10]
cm-ftrlist	cm-featureList-vn- yyyymmdd.xsd cm-featureList-vn.xsd cm-featureList.xsd	<Features>	[11]
didl-lite	didl-lite-vn- yyyymmdd.xsd didl-lite-vn.xsd didl-lite.xsd	<DIDL-Lite>	[15]
dmo	dmo-vn-yyyymmdd.xsd dmo-vn.xsd dmo.xsd	<DeviceMode>	[16]
dmor	dmor-vn-yyyymmdd.xsd dmor-vn.xsd dmor.xsd	<DeviceModeRequest>	[17]
dmos	dmos-vn-yyyymmdd.xsd dmos-vn.xsd dmos.xsd	<DeviceModeStatus>	[18]

Standard Name-space Prefix	Relative URI and File Name ^a • Form 1, Form 2, Form3	Valid Root Element(s)	Schema Reference
pi	pi-vn-yyyymmdd.xsd pi-vn.xsd pi.xsd	<PermissionsInfo>	[20]
rcs-event	rcs-event-vn-yyyymmdd.xsd rcs-event-vn.xsd rcs-event.xsd	<Event>	[22]
rii	rii-vn-yyyymmdd.xsd rii-vn.xsd rii.xsd	<rendererInfo>	[23]
rpl	rpl-vn-yyyymmdd.xsd rpl-vn.xsd rpl.xsd	<PlaylistInfo>	[24]
trs	TransformSettings-vn-yyyymmdd.xsd TransformSettings-vn.xsd TransformSettings.xsd	<TransformSettings>	[28]
srs	srs-vn-yyyymmdd.xsd srs-vn.xsd srs.xsd	<srs>	[26]
srs-event	srs-event-vn-yyyymmdd.xsd srs-event-vn.xsd srs-event.xsd	<StateEvent>	[27]
upnp	upnp-vn-yyyymmdd.xsd upnp-vn.xsd upnp.xsd	n/a	[29]
Externally Defined Namespaces			
dc	Absolute URL: http://dublincore.org/schemas/xmls/simpledc20021212.xsd		[12]
xsd	n/a	<schema>	[35]
xsi	n/a		n/a
xml	n/a		[31]
^a Absolute URIs are generated by prefixing the relative URIs with " http://www.upnp.org/schemas/av/ "			

4.3.1 Namespace Prefix Requirements

There are many occurrences in this specification of string data types that contain XML names (property names). These XML names in strings will not be processed under namespace-aware conditions. Therefore, all occurrences in instance documents of XML names in strings shall use the standard namespace prefixes as declared in Table 3. In order to properly process the XML documents described herein, control points and devices shall use namespace-aware XML processors [32] for both reading and writing. As allowed by [32], the namespace prefixes used in an instance document are at the sole discretion of the document creator. Therefore, the declared prefix for a namespace in a document may be different from the standard prefix. All devices shall be able to correctly process any valid XML instance document, even when it uses a non-standard prefix for ordinary XML names. However, it is strongly recommended that all devices use these standard prefixes for all instance documents to avoid confusion on the part of both human and machine readers. These standard prefixes are used in all descriptive text and all XML examples in this and related UPnP specifications. However, each individual specification may assume a default namespace for its descriptive text. In that case, names from that namespace may appear with no prefix.

The assumed default namespace, if any, for each UPnP AV specification is given in Table 5.

Note: all UPnP AV schemas declare attributes to be “unqualified”, so namespace prefixes are never used with AV Working Committee defined attribute names.

Table 5 — Default Namespaces for the AV Specifications

AV Specification Name	Default Namespace Prefix
AVTransport	avt-event
ConnectionManager	<i>n/a</i>
ContentDirectory	didl-lite
MediaRenderer	<i>n/a</i>
MediaServer	<i>n/a</i>
RenderingControl	rct-event
ScheduledRecording	srs

4.3.2 Namespace Names, Namespace Versioning and Schema Versioning

The UPnP AV service specifications define several data structures (such as state variables and action arguments) whose format is an XML instance document that complies with one or more specific XML schemas, which define XML namespaces. Each namespace is uniquely identified by an assigned namespace name. The namespace names that are defined by the AV Working Committee are URNs. See Table 3 for a current list of namespace names. Additionally, each namespace corresponds to an XML schema document that provides a machine-readable representation of the associated namespace to enable automated validation of the XML (state variable or action parameter) instance documents.

Within an XML schema and XML instance document, the name of each corresponding namespace appears as the value of an `xmlns` attribute within the root element. Each `xmlns` attribute also includes a namespace prefix that is associated with that namespace in order to qualify and disambiguate element and attribute names that are defined within different namespaces. The schemas that correspond to the listed namespaces are identified by URI values that are listed in the `schemaLocation` attribute also within the root element (see subclause 4.3.3).

In order to enable both forward and backward compatibility, namespace names are permanently assigned and shall not change even when a new version of a specification changes the definition of a namespace. However, all changes to a namespace definition shall be backward-compatible. In other words, the updated definition of a namespace shall not invalidate any XML documents that comply with an earlier definition of that same namespace. This means, for example, that a namespace shall not be changed so that a new element or attribute becomes required in a conforming instance document. Although namespace names shall not change, namespaces still have version numbers that reflect a specific set of definitional changes. Each time the definition of a namespace is changed, the namespace's version number is incremented by one.

Whenever a new namespace version is created, a new XML schema document (.xsd) is created and published so that the new namespace definition is represented in a machine-readable form. Since a XML schema document is just a representation of a namespace definition, translation errors can occur. Therefore, it is sometime necessary to re-release a published schema in order to correct typos or other namespace representation errors. In order to easily identify the potential multiplicity of schema releases for the same namespace, the URI of each released schema shall conform to the following format (called Form 1):

Form 1: "http://www.upnp.org/schemas/av/" **schema-root-name** "-v" **ver** "-" **yyyymmdd** where

- **schema-root-name** is the name of the root element of the namespace that this schema represents.
- **ver** corresponds to the version number of the namespace that is represented by the schema.

- **yyyymmdd** is the year, month and day (in the Gregorian calendar) that this schema was released.

Table 4 identifies the URI formats for each of the namespaces that are currently defined by the UPnP AV Working Committee.

As an example, the original schema URI for the “rcs-event” namespace (that was released with the original publication of the UPnP AV service specifications in the year 2002) was “<http://www.upnp.org/schemas/av/rcs-event-v1-20020625.xsd>”. When the UPnP AV service specifications were subsequently updated in the year 2006, the URI for the updated version of the “rcs-event” namespace was “<http://www.upnp.org/schemas/av/rcs-event-v2-20060531.xsd>”. However, in 2006, the schema URI for the newly created “srs-event” namespace was “<http://www.upnp.org/schemas/av/srs-event-v1-20060531.xsd>”. Note the version field for the “srs-event” schema is “v1” since it was first version of that namespace whereas the version field for the “rcs-event” schema is “v2” since it was the second version of that namespace.

In addition to the dated schema URIs that are associated with each namespace, each namespace also has a set of undated schema URIs. These undated schema URIs have two distinct formats with slightly different meanings:

Form 2: “<http://www.upnp.org/schemas/av/>” *schema-root-name* “-v” **ver**
where **ver** is described above.

Form 3: “<http://www.upnp.org/schemas/av/>” *schema-root-name*

Form 2 of the undated schema URI is always linked to the most recent release of the schema that represents the version of the namespace indicated by **ver**. For example, the undated URI “.../av/rcs-event-v2.xsd” is linked to the most recent schema release of version 2 of the “rcs-event” namespace. Therefore, on May 31, 2006 (20060531), the undated schema URI was linked to the schema that is otherwise known as “.../av/rcs-event-v2-20060531.xsd”. Furthermore, if the schema for version 2 of the “rcs-event” namespace was ever re-released, for example to fix a typo in the 20060531 schema, then the same undated schema URI (“.../av/rcs-event-v2.xsd”) would automatically be updated to link to the updated version 2 schema for the “rcs-event” namespace.

Form 3 of the undated schema URI is always linked to the most recent release of the schema that represents the highest version of the namespace that has been published. For example, on June 25, 2002 (20020625), the undated schema URI “.../av/rcs-event.xsd” was linked to the schema that is otherwise known as “.../av/rcs-event-v1-20020625.xsd”. However, on May 31, 2006 (20060531), that same undated schema URI was linked to the schema that is otherwise known as “.../av/rcs-event-v2-20060531.xsd”.

When referencing a schema URI within an XML instance document or a referencing XML schema document, the following usage rules apply:

- All instance documents, whether generated by a service or a control point, shall use Form 3.
- All UPnP AV published schemas that reference other UPnP AV schemas shall also use Form 3.

Within an XML instance document, the definition for the `schemaLocation` attribute comes from the XML Schema namespace “<http://www.w3.org/2002/XMLSchema-instance>”. A single occurrence of the attribute can declare the location of one or more schemas. The `schemaLocation` attribute value consists of a whitespace separated list of values that is interpreted as a namespace name followed by its schema location URL. This pair-sequence is repeated as necessary for the schemas that need to be located for this instance document.

In addition to the schema URI naming and usage rules described above, each released schema shall contain a `version` attribute in the `<schema>` root element. Its value shall correspond to the format:

ver “-” **yyyymmdd** where **ver** and **yyyymmdd** are described above.

The `version` attribute provides self-identification of the namespace version and release date of the schema itself. For example, within the original schema released for the “rcs-event” namespace (`.../rcs-event-v2-20020625.xsd`), the `<schema>` root element contains the following attribute: `version="2-20020625"`.

4.3.3 Namespace Usage Examples

The `schemaLocation` attribute for XML instance documents comes from the XML Schema instance namespace “`http://www.w3.org/2002/XMLSchema-instance`”. A single occurrence of the attribute can declare the location of one or more schemas. The `schemaLocation` attribute value consists of a whitespace separated list of values: namespace name followed by its schema location URL. This pair-sequence is repeated as necessary for the schemas that need to be located for this instance document.

Example 1:

Sample *DIDL-Lite XML Instance Document*. Note that the references to the UPnP AV schemas do not contain any version or release date information. In other words, the references follow Form 3 from above. Consequently, this example is valid for all releases of the UPnP AV service specifications.

```
<?xml version="1.0" encoding="UTF-8"?>
<DIDL-Lite
  xmlns:dc="http://purl.org/dc/elements/1.1/"
  xmlns="urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/"
  xmlns:upnp="urn:schemas-upnp-org:metadata-1-0/upnp/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="
    urn:schemas-upnp-org:metadata-1-0/DIDL-Lite/
      http://www.upnp.org/schemas/av/didl-lite.xsd
    urn:schemas-upnp-org:metadata-1-0/upnp/
      http://www.upnp.org/schemas/av/upnp.xsd">
  <item id="18" parentID="13" restricted="0">
    ...
  </item>
</DIDL-Lite>
```

4.4 Vendor-defined Extensions

Whenever vendors create additional vendor-defined state variables, actions or properties, their assigned names and XML representation shall follow the naming conventions and XML rules as specified below in subclauses 4.4.1 to 4.4.4.

4.4.1 Vendor-defined Action Names

Vendor-defined action names shall begin with “**X**”. Additionally, it should be followed by an ICANN assigned domain name owned by the vendor followed by the underscore character (“_”). It shall then be followed by the vendor-assigned action name. The vendor-assigned action name shall not contain a hyphen character (“-”, 2D Hex in UTF-8) nor a hash character (“#”, 23 Hex in UTF-8). Vendor-assigned action names are case sensitive. The first character of the name shall be a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), or a non-experimental Unicode letter or digit greater than U+007F. Succeeding characters shall be a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), a period (“.”), a Unicode combiningchar, an extender, or a non-experimental Unicode letter or digit greater than U+007F. The first three letters shall not be “XML” in any combination of case.

4.4.2 Vendor-defined State Variable Names

Vendor-defined state variable names shall begin with “**X**”. Additionally, it should be followed by an ICANN assigned domain name owned by the vendor, followed by the underscore character (“_”). It shall then be followed by the vendor-assigned state variable name. The vendor-assigned state variable name shall not contain a hyphen character (“-”, 2D Hex in UTF-8). Vendor-assigned action names are case sensitive. The first character of the name shall be a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), or a non-experimental Unicode letter or digit greater than U+007F. Succeeding characters shall be

a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), a period (“.”), a Unicode combiningchar, an extender, or a non-experimental Unicode letter or digit greater than U+007F. The first three letters shall not be “XML” in any combination of case.

4.4.3 Vendor-defined XML Elements and attributes

UPnP vendors may add non-standard elements and attributes to a UPnP standard XML document, such as a device or service description. Each addition shall be scoped by a vendor-owned XML namespace. Arbitrary XML shall be enclosed in an element that begins with “X,” and this element shall be a sub element of a standard complex type. Non-standard attributes may be added to standard elements provided these attributes are scoped by a vendor-owned XML namespace and begin with “X”.

4.4.4 Vendor-defined Property Names

UPnP vendors may add non-standard properties to the ContentDirectory service. Each property addition shall be scoped by a vendor-owned namespace. The vendor-assigned property name shall not contain a hyphen character (“-”, 2D Hex in UTF-8). Vendor-assigned property names are case sensitive. The first character of the name shall be a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), or a non-experimental Unicode letter or digit greater than U+007F. Succeeding characters shall be a US-ASCII letter (“A”-“Z”, “a”-“z”), US-ASCII digit (“0”-“9”), an underscore (“_”), a period (“.”), a Unicode combiningchar, an extender, or a non-experimental Unicode letter or digit greater than U+007F. The first three letters shall not be “XML” in any combination of case.

5 Device Definitions

5.1 Device Type

The following device type identifies a device that is compliant with this specification:

urn:schemas-upnp-org:device:MediaServer:4

The shorthand MediaServer is used herein to refer to this device type.

5.2 Device Model

MediaServer products shall implement minimum version numbers of all required embedded devices and services specified in Table 6 below. A MediaServer device can be either a Root device or can be Embedded in another UPnP device (MediaServer or other). A MediaServer device (Root or Embedded) can in turn contain other standard or non-standard Embedded UPnP devices.

Table 6 — Device Requirements

DeviceType	Root	R/A a	ServiceType	R/A	Service ID b
<u>MediaServer:4</u>	<u>Root</u> or <u>Embedded</u>	<u>R</u>	<u>ContentDirectory:4</u>	<u>R</u>	<u>ContentDirectory</u>
			<u>ConnectionManager:3</u>	<u>R</u>	<u>ConnectionManager</u>
			<u>AVTransport:3</u>	<u>A</u>	<u>AVTransport</u>
			<u>ScheduledRecording:2</u>	<u>A</u>	<u>ScheduledRecording</u>
			<u>DeviceProtection:1</u>	<u>CR</u> c	<u>DeviceProtection</u>
			Standard non-AV services defined by UPnP (QoS, Security, etc.) go here.	<u>X</u>	TBD
			Non-standard services embedded by a UPnP vendor go here.	<u>X</u>	TBD
<u>Standard devices embedded by a UPnP vendor go here.</u>	<u>Embedded</u>	<u>A</u>	<u>Services as defined by the corresponding standard UPnP Device Definition go here.</u>		

Non-standard devices embedded by a UPnP vendor go here.	<u>Embedded</u>	<u>X</u>	TBD	TBD	TBD
<p>a <u>R</u> = required, <u>A</u> = allowed, <u>CR</u> = conditionally required, <u>CA</u> = conditionally allowed, <u>X</u> = Non-standard, add <u>-D</u> when deprecated (e.g., <u>R-D</u>, <u>A-D</u>).</p> <p>b Prefixed by urn:<u>upnp-org:serviceId</u>:</p> <p>c Required if the ContentDirectory service implementation supports the <i>CONTENT_PROTECTION</i> feature.</p>					

5.2.1 Description of Device Requirements

Any instance of a MediaServer shall have a ContentDirectory service and a ConnectionManager service. For a given instance (MediaServer), there shall only be one instance of these services. There may be one instance of a AVTransport service. There may also be one instance of a ScheduledRecording service. The semantics of additional standard AV services are not defined. The DeviceProtection service [36] shall be present if the ContentDirectory service implements the *DEVICE_PROTECTION* feature. Other standard services, such as UPnP QoS, may be added with semantics defined by the relevant specifications.

It should be noted that a MediaServer:4 implementation shall respond to all SSDP queries that specify MediaServer:3 or lower and shall respond to all actions defined by MediaServer:3 or lower.

The ContentDirectory service allows control points to discover information about the AV content that is available from the device. The ConnectionManager is used to enumerate and select a particular transfer protocol and data format to be used for transferring the content. Additionally, the ConnectionManager also allows control points, such as a home network management application, to discover useful information about the content transfers that the device is actively participating in. Such information could be useful to a Quality of Service capability, which may be defined in the future.

The existence of the AVTransport service depends on the transfer protocols that are supported by the device. The ConnectionManager specification indicates which types of transfer protocols need an AVTransport service to be implemented on the MediaServer. See ConnectionManager specification [9], Annex C for more details.

5.2.2 Relationships Between Services

The ConnectionManager::PrepareForConnection() action provides the trigger point for creating a new virtual instance of the AVTransport service (refer to the AVTransport service specification for a description of virtual instances of the AVTransport service). When a new connection is established (one that requires an AVTransport service on the MediaServer, which is determined by the selected transfer protocol), the ConnectionManager::PrepareForConnection() action returns the InstanceID of the virtual instance of the AVTransport service that is bound to that connection. This virtual instance is used by the control point to control the flow (for example, AVTransport::Play(), AVTransport::Seek(), etc.) of the content to the network. As described in the AVTransport service specification, each virtual instance of the AVTransport service operates independently.

The ScheduledRecording::CreateRecordSchedule() action may use objects (such as a User Channel item or an EPG item) exposed by the ContentDirectory service to specify what broadcast content will be recorded. The recorded content may then be exposed by the associated ContentDirectory service.

6 XML Device Description

```
<?xml version="1.0"?>
<root xmlns="urn:schemas-upnp-org:device-1-0">
  <specVersion>
    <major>1</major>
    <minor>0</minor>
  </specVersion>
</root>
```

```

</specVersion>
<URLBase>base URL for all relative URLs</URLBase>
<device>
  <deviceType>
    urn:schemas-upnp-org:device:MediaServer:4
  </deviceType>
  <friendlyName>short user-friendly title</friendlyName>
  <manufacturer>manufacturer name</manufacturer>
  <manufacturerURL>URL to manufacturer site</manufacturerURL>
  <modelDescription>long user-friendly title</modelDescription>
  <modelName>model name</modelName>
  <modelNumber>model number</modelNumber>
  <modelURL>URL to model site</modelURL>
  <serialNumber>manufacturer's serial number</serialNumber>
  <UDN>uuid:UUID</UDN>
  <UPC>Universal Product Code</UPC>
  <iconList>
    <icon>
      <mimetype>image/format</mimetype>
      <width>horizontal pixels</width>
      <height>vertical pixels</height>
      <depth>color depth</depth>
      <url>URL to icon</url>
    </icon>
    XML to declare other icons, if any, go here
  </iconList>
  <serviceList>
    <service>
      <serviceType>
        urn:schemas-upnp-org:service:ContentDirectory:4
      </serviceType>
      <serviceId>
        urn:upnp-org:serviceId:ContentDirectory
      </serviceId>
      <SCPDURL>URL to service description</SCPDURL>
      <controlURL>URL for control</controlURL>
      <eventSubURL>URL for eventing</eventSubURL>
    </service>
    <service>
      <serviceType>
        urn:schemas-upnp-org:service:ConnectionManager:3
      </serviceType>
      <serviceId>
        urn:upnp-org:serviceId:ConnectionManager
      </serviceId>
      <SCPDURL>URL to service description</SCPDURL>
      <controlURL>URL for control</controlURL>
      <eventSubURL>URL for eventing</eventSubURL>
    </service>
    <service>
      <serviceType>
        urn:schemas-upnp-org:service:AVTransport:3
      </serviceType>
      <serviceId>urn:upnp-org:serviceId:AVTransport</serviceId>
      <SCPDURL>URL to service description</SCPDURL>
      <controlURL>URL for control</controlURL>
      <eventSubURL>URL for eventing</eventSubURL>
    </service>
    <service>
      <serviceType>
        urn:schemas-upnp-org:service:ScheduledRecording:2
      </serviceType>

```

```

    <serviceId>
      urn:upnp-org:serviceId:ScheduledRecording
    </serviceId>
    <SCPDURL>URL to service description</SCPDURL>
    <controlURL>URL for control</controlURL>
    <eventSubURL>URL for eventing</eventSubURL>
  </service>
  <service>
    <serviceType>
      urn:schemas-upnp-org:service:DeviceProtection:1
    </serviceType>
    <serviceId>
      urn:upnp-org:serviceId:DeviceProtection
    </serviceId>
    <SCPDURL>URL to service description</SCPDURL>
    <controlURL>URL for control</controlURL>
    <eventSubURL>URL for eventing</eventSubURL>
  </service>
  Declarations for standard non-AV services defined by UPnP
  (if any) go here
  Declarations for other services added by UPnP vendor
  (if any) go here
</serviceList>
<deviceList>
  Description of embedded devices added by UPnP vendor
  (if any) go here
</deviceList>
  <presentationURL>URL for presentation</presentationURL>
</device>
</root>

```

7 Test

There are no semantic tests defined for this device.

Annex A (informative)

Theory of Operation

MediaServer devices are used in conjunction with one or more MediaRenderer devices to enable a control point to discover entertainment (AV) content (for example, video, music, images, etc) on the MediaServer and to render that content on any appropriate MediaRenderer within the home network. In general terms, the process begins with the control points discovering MediaServer and MediaRenderer devices within the home network. The control point interacts with a MediaServer(s) to locate a desired piece of content (for example, a movie, a song, a playlist, a photo album, etc). After the content has been identified, the control point needs to identify a common transfer protocol and data format that can be used to transfer the content from the MediaServer to the desired MediaRenderer. After these transfer parameters have been established, the control point controls the flow of the content (for example, [AVTransport::Play\(\)](#), [AVTransport::Pause\(\)](#), [AVTransport::Stop\(\)](#), [AVTransport::Seek\(\)](#), etc.) . (Depending on the selected transfer protocol, these flow control operations are sent either to the MediaServer or MediaRenderer, but not both). The actual transfer of the content is performed directly by the MediaServer and MediaRenderer. The content transfer happens independently from the control point and does not involve UPnP itself at all. The control point uses UPnP to setup the transfer of the content, but the transfer is performed using a transfer protocol other than UPnP. MediaServer devices also enable a control point to create a set of selection criteria to record content via the ScheduledRecording service. A control point can also discover recorded content on the MediaServer that was created by such a set of selection criteria.

A.1 Device Discovery

Control points can discover MediaServer devices using the standard UPnP SSDP-based device discovery mechanism to search for any device that is a member of the MediaServer device class including [Root](#) devices and/or [Embedded](#) devices.

A.2 Locating Desired Content

Control points use the MediaServer's ContentDirectory service to locate desired content. The ContentDirectory service exposes both a search capability and a browse capability. Searching is useful when the control point (via the end-user) knows something about the content it wants to find (for example, its name, artist, type, date created, etc). Browsing is useful for blindly discovering what content the device has to offer. Each content item that is referenced by the ContentDirectory service includes various information about that content including the transfer protocol(s) and file format(s) that the MediaServer can use to transfer the content to the MediaRenderer.

A.3 Preparing to Transfer the Content

After the desired content has been identified, the control point needs to determine which transfer protocol and data format need to be used to transfer the content from the MediaServer to the MediaRenderer. (Transfer protocol examples include IEEE-1394, HTTP GET, RTSP/RTP, etc., and data format examples include MPEG2, MPEG4, MP3, WMA, JPEG, etc.) The control point makes this determination by comparing the content's protocol/format information (obtained via the MediaServer's ContentDirectory service) with the protocol/format information obtained via the MediaRenderer's [ConnectionManager::GetProtocolInfo\(\)](#) action.

After the transfer protocol and data format have been identified, the control point uses the [ConnectionManager::PrepareForConnection\(\)](#) action on each device to inform the device that the specified protocol/format are about to be used. Depending on which transfer protocol was selected, the [ConnectionManager::PrepareForConnection\(\)](#) action on either the MediaServer or MediaRenderer will return an AVTransport [InstanceID](#) to the control point. This AVTransport [InstanceID](#) is used by the control point to control the transfer of the content (for example, [AVTransport::Play\(\)](#), [AVTransport::Pause\(\)](#), [AVTransport::Stop\(\)](#), [AVTransport::Seek\(\)](#), etc). Refer to the subclauses A.4 and A.5 below for more details.

Depending on which transfer protocols are supported by the device (for example, devices that only support HTTP GET), a MediaServer and/or MediaRenderer may choose to not implement the [ConnectionManager::PrepareForConnection\(\)](#) action. In this case, the control point may not have been able to obtain an AVTransport [InstanceID](#) from either device. When this happens, the control point should use an AVTransport [InstanceID](#) of 0 (zero). If the MediaRenderer has implemented the AVTransport service, the control point should use it for all AVTransport actions. Otherwise, AVTransport actions should be sent to the MediaServer device. Refer to the ConnectionManager service [9] for more information.

A.4 Controlling the Transfer of the Content

In all cases, the control point uses the [InstanceID](#), obtained as described above, to control the flow of the content. For example, to begin transferring the content, the control point invokes the [AVTransport::Play\(\)](#) action. To skip to a specific location within the content, the control point invokes the [AVTransport::Seek\(\)](#) action. In most cases, the choice of AVTransport actions that are actually invoked will likely be directed by the end-user while interacting with the control point's UI. Refer to the AVTransport service specification [5] for additional details of these and other AVTransport actions.

A.5 Recording Content

A control point invokes the [ScheduledRecording::CreateRecordSchedule\(\)](#) action on a MediaServer device with a set of selection criteria (called a [recordSchedule](#)) that the device will use to identify the content to record. These criteria are then used to create individual objects (called [recordTask](#) objects), each containing the information necessary to create a single recording. For example, a [recordSchedule](#) might hold criteria that select every occurrence of a broadcast series for recording. The ScheduledRecording service then creates a [recordTask](#) instance for every episode in the series.

After creating one or more [recordSchedule](#) instances, the control point can browse the list of [recordSchedule](#) instances and their associated [recordTask](#) instances using the [ScheduledRecording::BrowseRecordSchedules\(\)](#) action.

Annex B
(informative)

Bibliography

The following documents, in whole or in part, may be useful for understanding this document but they are not essential for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[37] – *XML Schema for UPnP AV Datastructure Template*, UPnP Forum, September 30, 2008.
Available at: <http://www.upnp.org/schemas/av/avdt-v1-20080930.xsd>.
Latest version available at: <http://www.upnp.org/schemas/av/avdt.xsd>.

[38] – *AVArchitecture:2*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/specs/av/UPnP-av-AVArchitecture-v2-20130331.pdf>.
Latest version available at: <http://www.upnp.org/specs/av/UPnP-av-AVArchitecture-v2.pdf>.

[39] – ISO/IEC CD 21000-2:2001, *Information Technology - Multimedia Framework - Part 2: Digital Item Declaration*, July 2001.

[40] – *HyperText Transport Protocol – HTTP/1.1*, R. Fielding, J. Gettys, J. Mogul, H. Frystyk, L. Masinter, P. Leach, T. Berners-Lee, June 1999.
Available at: <http://www.ietf.org/rfc/rfc2616.txt>.

[41] – *IEC 61883 Consumer Audio/Video Equipment – Digital Interface - Part 1 to 5*.
Available at: <http://www.iec.ch>.

[42] – *IEC-PAS 61883 Consumer Audio/Video Equipment – Digital Interface - Part 6*.
Available at: <http://www.iec.ch>.

[43] – *IEEE P802.1AS™ (Draft 7.0) - Timing and Synchronization for Time-Sensitive Applications in Bridged Local Area Networks*, Institute of Electrical and Electronics Engineers, March 23, 2010.
Available at: <http://www.ieee802.org/1/pages/802.1as.html>.

[44] – *IEEE-P1733™ (Draft 2.2) – Audio Video Bridge Layer 3 Transport Protocol*, International Institute of Electrical and Electronics Engineers, April 20, 2009.
Available at: <http://grouper.ieee.org/groups/1733>.

[45] – *Data elements and interchange formats – Information interchange -- Representation of dates and times*, International Standards Organization, December 21, 2000.
Available at: [ISO 8601:2000](http://www.iso.org/iso/8601).

[46] – *IETF RFC 1341, MIME (Multipurpose Internet Mail Extensions)*, N. Borenstein, N. Freed, June 1992.
Available at: <http://www.ietf.org/rfc/rfc1341.txt>.

[47] – *MediaRenderer:3*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/specs/av/UPnP-av-MediaRenderer-v3-Device-20130331.pdf>.
Latest version available at: <http://www.upnp.org/specs/av/UPnP-AV-MediaRenderer-v3-Device.pdf>.

[48] – *MediaServer:4*, UPnP Forum, March 31, 2013.
Available at: <http://www.upnp.org/specs/av/UPnP-av-MediaServer-v4-Device-20130331.pdf>.
Latest version available at: <http://www.upnp.org/specs/av/UPnP-AV-MediaServer-v4-Device.pdf>.

[49] – *IETF RFC 1305, Network Time Protocol (Version 3) Specification, Implementation and Analysis*, David L. Mills, March 1992.
Available at: <http://www.ietf.org/rfc/rfc1305.txt>.

- [50] – *IETF RFC 1321, The MD5 Message-Digest Algorithm*, R. Rivest, April 1992.
Available at: <http://tools.ietf.org/html/rfc1321>.
- [51] – *IETF RFC 1738, Uniform Resource Locators (URL)*, Tim Berners-Lee, et. Al., December 1994.
Available at: <http://www.ietf.org/rfc/rfc1738.txt>.
- [52] – *IETF RFC 2030, Simple Network Time Protocol (SNTP) Version 4 for IPv4, IPv6 and OS*, D Mills, October 1996.
Available at: <http://www.ietf.org/rfc/rfc2030.txt>.
- [53] – *IETF RFC 2045, Multipurpose Internet Mail Extensions (MIME) Part 1:Format of Internet Message Bodies*, N. Freed, N. Borenstein, November 1996.
Available at: <http://www.ietf.org/rfc/rfc2045.txt>.
- [54] – *IETF RFC 2119, Key words for use in RFCs to Indicate Requirement Levels*, S. Bradner, 1997.
Available at: <http://www.faqs.org/rfcs/rfc2119.html>.
- [55] – *IETF RFC 3986, Uniform Resource Identifiers (URI): Generic Syntax*, January 2005.
Available at: <http://www.ietf.org/rfc/rfc3986.txt>.
- [56] – *IETF RFC 3174, US Secure Hash Algorithm 1 (SHA1)*, D. Eastlake et al, September 2001.
Available at: <http://tools.ietf.org/html/rfc3174>.
- [57] – *IETF RFC 3339, Date and Time on the Internet: Timestamps*, G. Klyne, Clearswift Corporation, C. Newman, Sun Microsystems, July 2002.
Available at: <http://www.ietf.org/rfc/rfc3339.txt>.
- [58] – *IETF RFC 4078, The TV-Anytime Content Reference Identifier (CRID)*, N. Earnshaw et al, May 2005.
Available at: <http://www.ietf.org/rfc/rfc4078.txt>.
- [59] – *IETF RFC 3550, RTP: A Transport Protocol for Real-Time Applications*, H. Schulzrinne, S. Casner, R. Frederick, V. Jacobson, July 2003.
Available at: <http://www.ietf.org/rfc/rfc3550.txt>.
- [60] – *IETF RFC 2326, Real Time Streaming Protocol (RTSP)*, H. Schulzrinne, A. Rao, R. Lanphier, April 1998.
Available at: <http://www.ietf.org/rfc/rfc2326.txt>.
- [61] – *Unicode Standard Annex #15, Unicode Normalization Forms, version 4.1.0, revision 25*, M. Davis, M. Dürst, March 25, 2005.
Available at: <http://www.unicode.org/reports/tr15/tr15-25.html>.
- [62] – *Unicode Technical Standard #10, Unicode Collation Algorithm version 4.1.0*, M. Davis, K. Whistler, May 5, 2005.
Available at: <http://www.unicode.org/reports/tr10/tr10-14.html>.
- [63] – *Unicode Technical Standard #10, Unicode Collation Algorithm, version 4.1.0, revision 14*, M. Davis, K. Whistler, May 5, 2005.
Available at: <http://www.unicode.org/reports/tr10/tr10-14.html>.
- [64] – *Unicode Technical Standard #35, Locale Data Markup Language, version 1.3R1, revision 5*, M. Davis, June 2, 2005.
Available at: <http://www.unicode.org/reports/tr35/tr35-5.html>.
- [65] – *IETF RFC 4122, A Universally Unique Identifier (UUID) URN Namespace*, P. Leach, Microsoft, M. Mealling, Refactored Networks LLC, R. Salz, DataPower Technology, Inc., July 2005.
Available at: <http://www.ietf.org/rfc/rfc4122.txt>.

[66] – *Extensible Markup Language (XML) 1.0 (Third Edition)*, François Yergeau, Tim Bray, Jean Paoli, C. M. Sperberg-McQueen, Eve Maler, eds., W3C Recommendation, February 4, 2004.

Available at: <http://www.w3.org/TR/2004/REC-xml-20040204>.

[67] – *XML Path Language (XPath) 2.0*. Anders Berglund, Scott Boag, Don Chamberlin, Mary F. Fernandez, Michael Kay, Jonathan Robie, Jerome Simeon. W3C Recommendation, 21 November 2006.

Available at: <http://www.w3.org/TR/xpath20>.

[68] – *XQuery 1.0 An XML Query Language*. W3C Recommendation, 23 January 2007.

Available at: <http://www.w3.org/TR/2007/REC-xquery-20070123>.

